



Keeping You Connected.



SEMI
PREMIUMCONNECTIONS
FIELD TESTED. FIELD PROVEN.

Precision Connections BK-HT

7.625 in. 26.4 lb/ft P110 EC with 8.5 in. Coupling OD

Pipe Body

Nominal OD	7.625	inches
Nominal Weight	26.40	lb/ft
Wall Thickness	0.328	inches
Plain End Weight	25.56	lb/ft
Drift	6.844	inches
Nominal ID	6.969	inches
Grade	P110 EC	
Min Yield	125,000	lbf/in ²
Min Tensile	135,000	lbf/in ²
Critical Section Area	7.519	in ²
Pipe Body Yield Strength	940	kips
Min Internal Yield Pressure	9,410	psi
Collapse Pressure	4,900	psi


Connection

Coupling OD	8.500	inches
Coupling Length	9.375	inches
Make Up Loss	4.688	inches
Critical Section Area	13.063	in ²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	940	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	67.4	° / 100 ft
Min Make Up Torque	10,000	ft-lbs
Yield Torque	39,100	ft-lbs

v1.2

7/26/2018

This documentation contains confidential and proprietary information not to be reproduced or divulged in whole or in part to anyone outside of your company without prior written authorization from Precision Connections, LLC, and such documentation and information is provided to you upon such conditions of confidentiality.



Torque Data Sheet - Precision Connections BK-HT

7.625 in. 26.4 lb/ft P110 EC with 8.5 in. Coupling OD

Min Make Up Torque 10,000 ft-lbs


Max Make Up Torque 29,300 ft-lbs

Optimum Torque 14,050 ft-lbs

Max Operating Torque 33,250 ft-lbs

Yield Torque 39,100 ft-lbs

Representative Torque Turn Graph

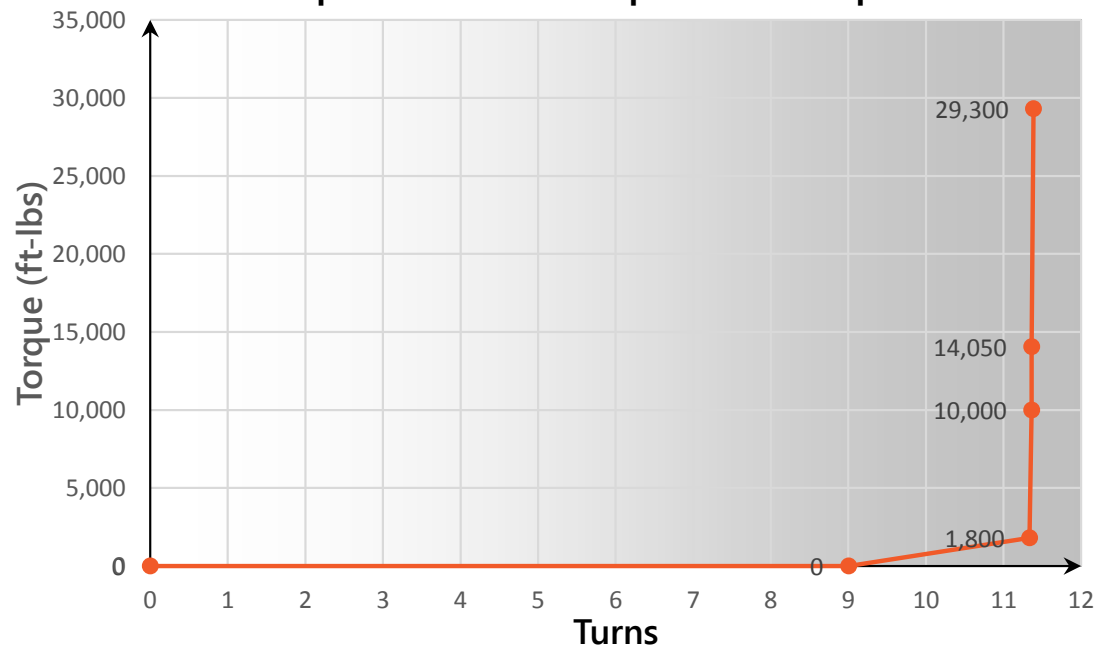

v1.2

7/26/2018