



Precision Connections BK-FX
7.625 in. 33.7 lb/ft P-110 with 8.5 in. Coupling OD



SEMI
PREMIUMCONNECTIONS
FIELD TESTED. FIELD PROVEN.

Pipe Body

Nominal OD	7.625	inches
Nominal Weight	33.70	lb/ft
Wall Thickness	0.43	inches
Plain End Weight	33.04	lb/ft
Drift	6.640	inches
Nominal ID	6.765	inches
Grade	P-110	
Min Yield	110,000	lbf/in ²
Min Tensile	125,000	lbf/in ²
Critical Section Area	9.720	in ²
Pipe Body Yield Strength	1069	kips
Min Internal Yield Pressure	10,860	psi
Collapse Pressure	7,870	psi

Connection

Coupling OD	8.500	inches
Coupling Length	10.000	inches
Make Up Loss	4.688	inches
Critical Section Area	13.063	in ²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	1069	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	59.3	° / 100 ft
Min Make Up Torque	10,000	ft-lbs
Yield Torque	53,450	ft-lbs



v1.1

1/4/2019




Torque Data Sheet - Precision Connections BK-FX

7.625 in. 33.7 lb/ft P-110 with 8.5 in. Coupling OD

Min Make Up Torque	10,000	ft-lbs	Max Operating Torque	45,450	ft-lbs
Max Make Up Torque	40,100	ft-lbs	Yield Torque	53,450	ft-lbs
Optimum Torque	19,250	ft-lbs			

Representative Torque Turn Graph

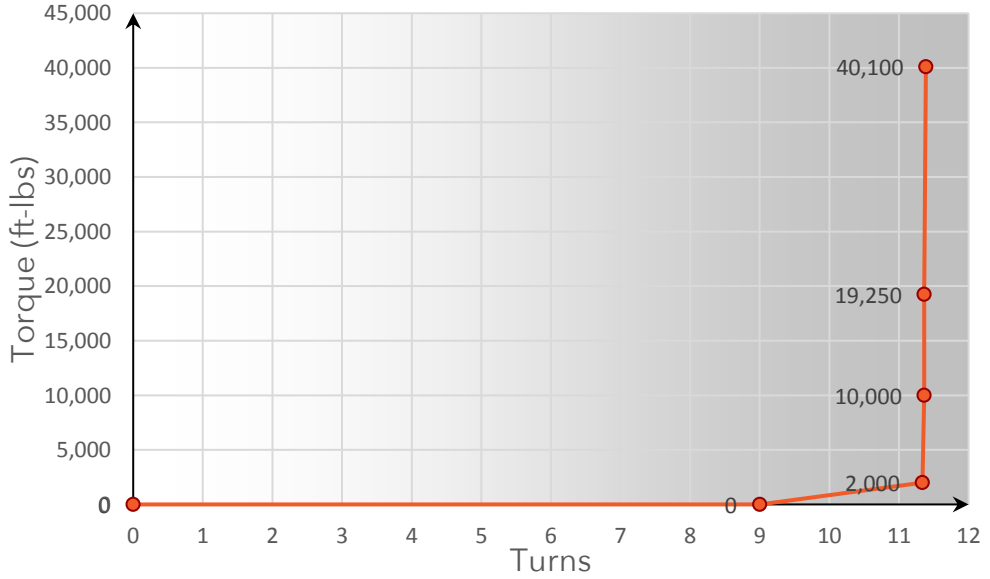

v1.1

1/4/2019