




Keeping You Connected.

Precision Connections BK

9.625 in. 40 lb/ft Q-125 with 10.625 in. Coupling OD



SEMI
PREMIUMCONNECTIONS
FIELD TESTED. FIELD PROVEN.

Pipe Body

Nominal OD	9.625	inches
Nominal Weight	40.00	lb/ft
Wall Thickness	0.395	inches
Plain End Weight	38.94	lb/ft
Drift	8.750	inches
Nominal ID	8.835	inches
Grade	Q-125	
Min Yield	125,000	lbf/in ²
Min Tensile	135,000	lbf/in ²
Critical Section Area	11.454	in ²
Pipe Body Yield Strength	1432	kips
Min Internal Yield Pressure	8,980	psi
Collapse Pressure	3,530	psi


Connection

Coupling OD	10.625	inches
Coupling Length	9.625	inches
Make Up Loss	4.813	inches
Critical Section Area	18.558	in ²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	1432	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	53.9	° / 100 ft
Min Make Up Torque	10,000	ft-lbs
Yield Torque	85,050	ft-lbs

v1.2

7/26/2018

This documentation contains confidential and proprietary information not to be reproduced or divulged in whole or in part to anyone outside of your company without prior written authorization from Precision Connections, LLC, and such documentation and information is provided to you upon such conditions of confidentiality.



Torque Data Sheet - Precision Connections BK

9.625 in. 40 lb/ft Q-125 with 10.625 in. Coupling OD

Min Make Up Torque 10,000 ft-lbs


Max Make Up Torque 63,800 ft-lbs

Optimum Torque 20,000 ft-lbs

Max Operating Torque 72,300 ft-lbs

Yield Torque 85,050 ft-lbs

Representative Torque Turn Graph

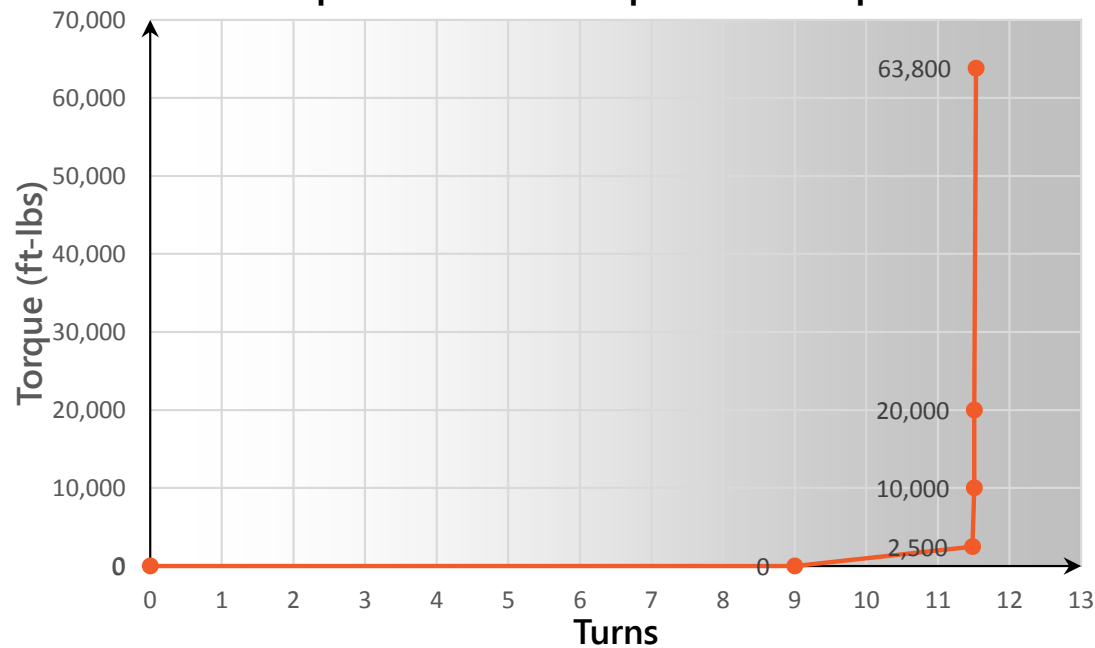

v1.2

7/26/2018