




Keeping You Connected.

Precision Connections BK

9.625 in. 43.5 lb/ft P110 EC with 10.625 in. Coupling OD



SEMI
PREMIUMCONNECTIONS
FIELD TESTED. FIELD PROVEN.

Pipe Body

Nominal OD	9.625	inches
Nominal Weight	43.50	lb/ft
Wall Thickness	0.435	inches
Plain End Weight	42.69	lb/ft
Drift	8.599	inches
Nominal ID	8.755	inches
Grade	P110 EC	
Min Yield	125,000	lbf/in ²
Min Tensile	135,000	lbf/in ²
Critical Section Area	12.559	in ²
Pipe Body Yield Strength	1570	kips
Min Internal Yield Pressure	9,890	psi
Collapse Pressure	5,770	psi

Connection


Coupling OD	10.625	inches
Coupling Length	9.625	inches
Make Up Loss	4.813	inches
Critical Section Area	18.558	in ²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	1570	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	53.9	° / 100 ft
Min Make Up Torque	10,000	ft-lbs
Yield Torque	98,800	ft-lbs



v1.2

7/26/2018

This documentation contains confidential and proprietary information not to be reproduced or divulged in whole or in part to anyone outside of your company without prior written authorization from Precision Connections, LLC, and such documentation and information is provided to you upon such conditions of confidentiality.




Torque Data Sheet - Precision Connections BK

9.625 in. 43.5 lb/ft P110 EC with 10.625 in. Coupling OD

Min Make Up Torque	10,000	ft-lbs
Max Make Up Torque	74,100	ft-lbs
Optimum Torque	20,000	ft-lbs

Max Operating Torque	84,000	ft-lbs
Yield Torque	98,800	ft-lbs

Representative Torque Turn Graph

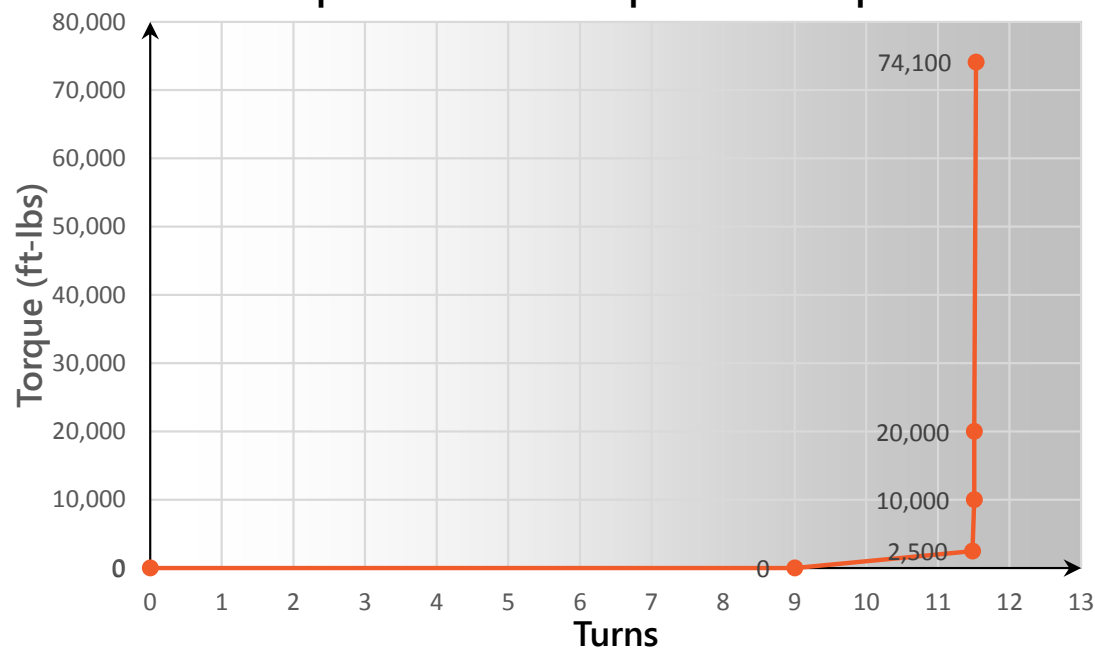

v1.2

7/26/2018