



Keeping You Connected.



SEMI
PREMIUMCONNECTIONS
FIELD TESTED. FIELD PROVEN.

Precision Connections BK-HT

5.5 in. 26 lb/ft HC-P110 with 6.3 in. Coupling OD

Pipe Body

Nominal OD	5.500	inches
Nominal Weight	26.00	lb/ft
Wall Thickness	0.476	inches
Plain End Weight	25.55	lb/ft
Drift	4.545	inches
Nominal ID	4.548	inches
Grade	HC-P110	
Min Yield	110,000	lbf/in ²
Min Tensile	125,000	lbf/in ²
Critical Section Area	7.513	in ²
Pipe Body Yield Strength	826	kips
Min Internal Yield Pressure	16,660	psi
Collapse Pressure	#VALUE!	psi


Connection

Coupling OD	6.300	inches
Coupling Length	8.250	inches
Make Up Loss	4.125	inches
Critical Section Area	8.456	in ²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	826	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	80.0	° / 100 ft
Min Make Up Torque	10,000	ft-lbs
Yield Torque	42,000	ft-lbs

v1.2

7/26/2018

This documentation contains confidential and proprietary information not to be reproduced or divulged in whole or in part to anyone outside of your company without prior written authorization from Precision Connections, LLC, and such documentation and information is provided to you upon such conditions of confidentiality.



Torque Data Sheet - Precision Connections BK-HT

5.5 in. 26 lb/ft HC-P110 with 6.3 in. Coupling OD

Min Make Up Torque 10,000 ft-lbs


Max Make Up Torque 31,500 ft-lbs

Optimum Torque 15,100 ft-lbs

Max Operating Torque 35,700 ft-lbs

Yield Torque 42,000 ft-lbs

Representative Torque Turn Graph

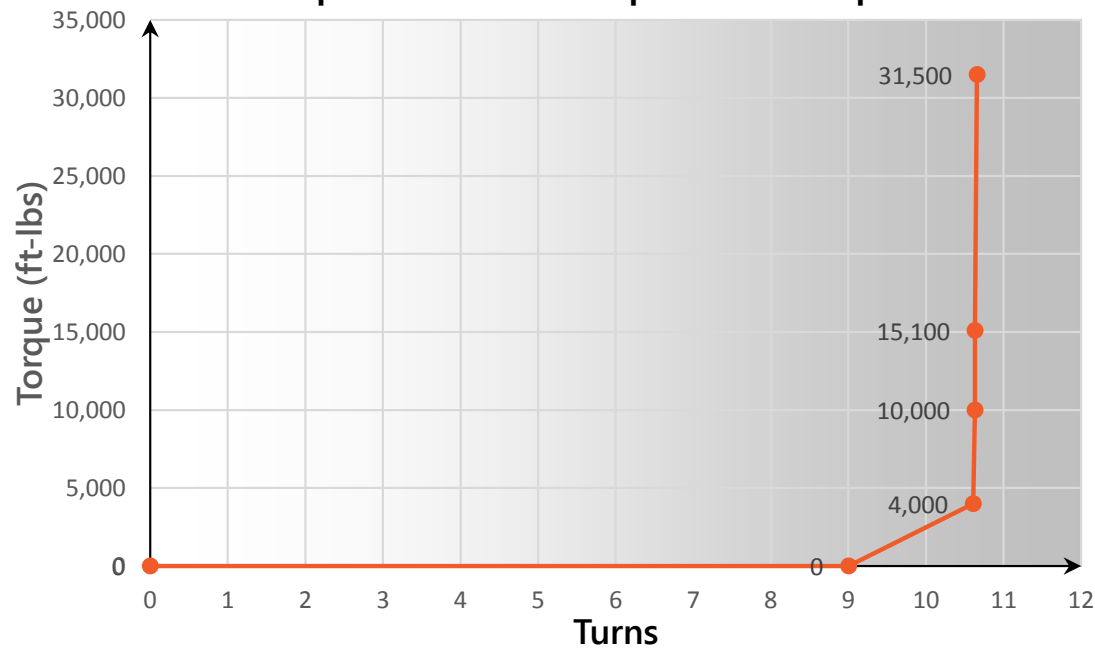

v1.2

7/26/2018