




Keeping You Connected.



SEMI
PREMIUMCONNECTIONS
FIELD TESTED. FIELD PROVEN.

Precision Connections BK-HT

6 in. 24 lb/ft P-110 with 6.875 in. Coupling OD

Pipe Body

Nominal OD	6.000	inches
Nominal Weight	24.00	lb/ft
Wall Thickness	0.4	inches
Plain End Weight	23.95	lb/ft
Drift	5.075	inches
Nominal ID	5.200	inches
Grade	P-110	
Min Yield	110,000	lbf/in ²
Min Tensile	125,000	lbf/in ²
Critical Section Area	7.037	in ²
Pipe Body Yield Strength	774	kips
Min Internal Yield Pressure	12,830	psi
Collapse Pressure	11,460	psi


Connection

Coupling OD	6.875	inches
Coupling Length	8.625	inches
Make Up Loss	4.313	inches
Critical Section Area	10.112	in ²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	774	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	73.3	° / 100 ft
Min Make Up Torque	14,250	ft-lbs
Yield Torque	28,500	ft-lbs

v1.2

1/15/2019

This documentation contains confidential and proprietary information not to be reproduced or divulged in whole or in part to anyone outside of your company without prior written authorization from Precision Connections, LLC, and such documentation and information is provided to you upon such conditions of confidentiality.




Torque Data Sheet - Precision Connections BK-HT

6 in. 24 lb/ft P-110 with 6.875 in. Coupling OD

Min Make Up Torque	14,250	ft-lbs
Max Make Up Torque	21,400	ft-lbs
Optimum Torque	15,700	ft-lbs

Max Operating Torque	24,250	ft-lbs
Yield Torque	28,500	ft-lbs

Representative Torque Turn Graph

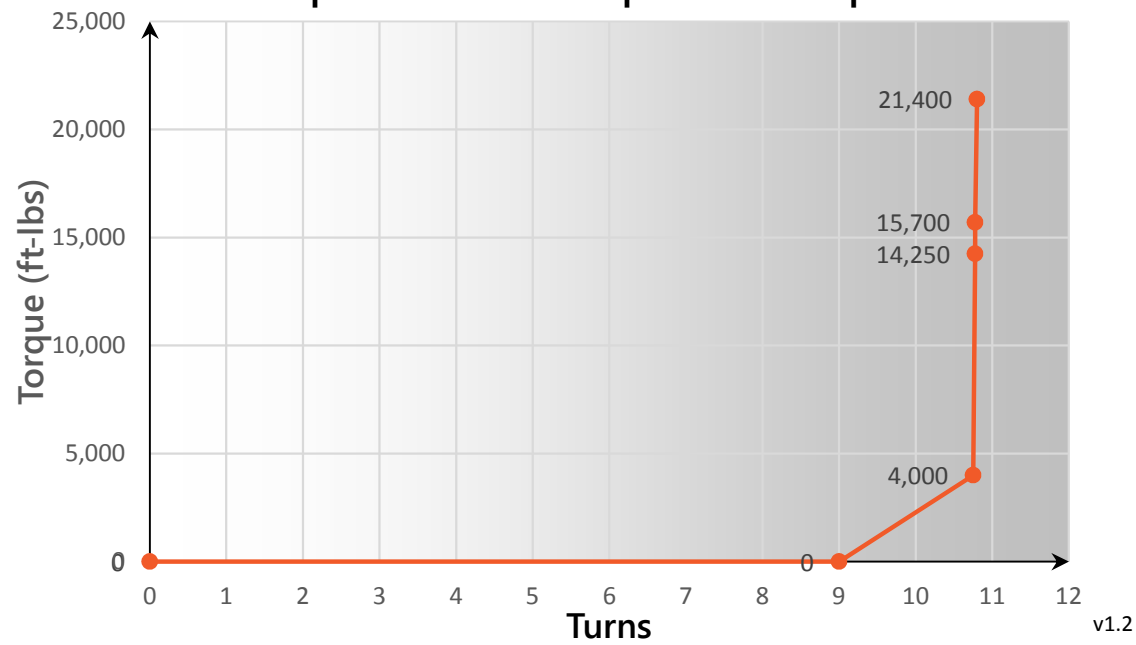

v1.2

1/15/2019