



Keeping You Connected.



SEMI  
**PREMIUMCONNECTIONS**  
FIELD TESTED. FIELD PROVEN.

## Precision Connections BK-HT

6.625 in. 24 lb/ft Q-125 with 7.475 in. Coupling OD

### Pipe Body

Nominal OD	6.625	inches
Nominal Weight	24.00	lb/ft
Wall Thickness	0.352	inches
Plain End Weight	23.58	lb/ft
Drift	5.796	inches
Nominal ID	5.921	inches
Grade	Q-125	
Min Yield	125,000	lbf/in <sup>2</sup>
Min Tensile	135,000	lbf/in <sup>2</sup>
Critical Section Area	6.937	in <sup>2</sup>
Pipe Body Yield Strength	867	kips
Min Internal Yield Pressure	11,620	psi
Collapse Pressure	7,020	psi

### Connection

Coupling OD	7.475	inches
Coupling Length	8.625	inches
Make Up Loss	4.313	inches
Critical Section Area	10.852	in <sup>2</sup>
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	867	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	76.7	° / 100 ft
Min Make Up Torque	8,650	ft-lbs
Yield Torque	33,250	ft-lbs

v1.2

1/3/2019

This documentation contains confidential and proprietary information not to be reproduced or divulged in whole or in part to anyone outside of your company without prior written authorization from Precision Connections, LLC, and such documentation and information is provided to you upon such conditions of confidentiality.




## Torque Data Sheet - Precision Connections BK-HT

6.625 in. 24 lb/ft Q-125 with 7.475 in. Coupling OD

Min Make Up Torque	8,650	ft-lbs
Max Make Up Torque	24,950	ft-lbs
Optimum Torque	11,950	ft-lbs

Max Operating Torque	28,250	ft-lbs
Yield Torque	33,250	ft-lbs

**Representative Torque Turn Graph**

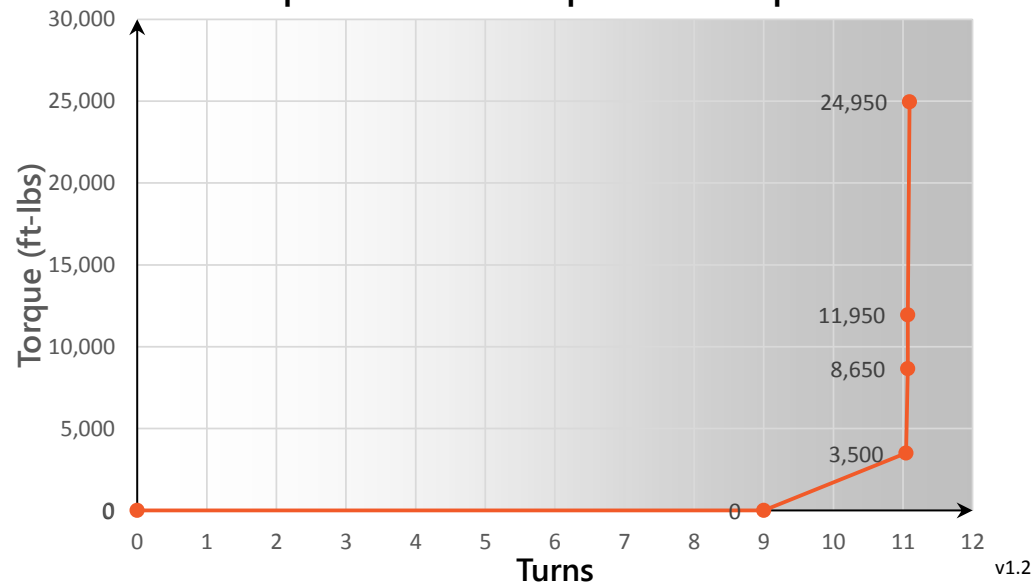

v1.2

1/3/2019