

Keeping You Connected.

Precision Connections BK-HT 6.625 in. 32 lb/ft P-110 with 7.475 in. Coupling OD



Pipe	Body

•		
Nominal OD	6.625	inches
Nominal Weight	32.00	lb/ft
Wall Thickness	0.475	inches
Plain End Weight	31.20	lb/ft
Drift	5.550	inches
Nominal ID	5.675	inches
Grade	P-110	
Min Yield	110,000	lbf/in²
Min Tensile	125,000	lbf/in²
Critical Section Area	9.177	in²
Pipe Body Yield Strength	1010	kips
Min Internal Yield Pressure	13,800	psi
Collapse Pressure	13,220	psi

Connection

Coupling OD	7.475	inches
Coupling Length	8.625	inches
Make Up Loss	4.313	inches
Critical Section Area	10.852	in²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	1010	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	67.5	° / 100 ft
Min Make Up Torque	10,000	ft-lbs 👖
Yield Torque	45,000	ft-lbs 🚺

v1.2

1/3/2019








Torque Data Sheet - Precision Connections BK-HT 6.625 in. 32 lb/ft P-110 with 7.475 in. Coupling OD

Min Make Up Torque	10,000	ft-lbs	
Max Make Up Torque	33,750	ft-lbs	
Optimum Torque	16,200	ft-lbs	

Max Operating Torque 38,250 ft-lbs Yield Torque 45,000 ft-lbs

Representative Torque Turn Graph

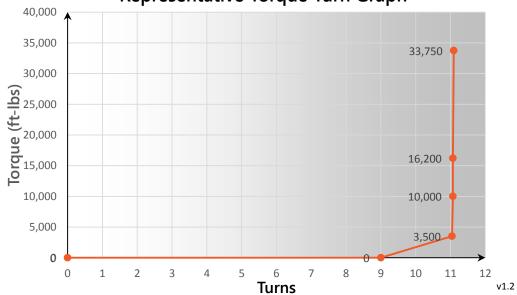

1/3/2019