



Precision Connections BK-HT Blanking Dimensions

4.5 in. 11.6 lb/ft with 5.25 in. Coupling OD

Pipe Body


Nominal OD	4.500	inches	Plain End Weight	11.35	lb/ft
Nominal Weight	11.60	lb/ft	Drift	3.875	inches
Wall Thickness	0.250	inches	Nominal ID	4.000	inches

Pin Blanking Dimensions



Pin OD Max	4.545	inches	Pin Minimum Length	4.500	inches
Pin OD Min	4.500	inches	Additional Recut Length	2.125	inches
Pin ID	4.000 ± .016	inches			

Box Blanking Dimensions

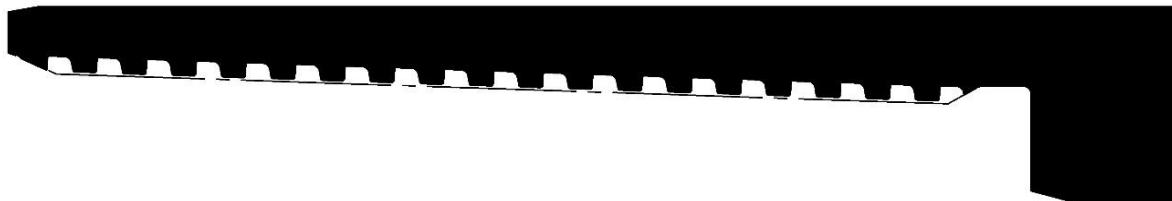

Box OD Max	5.300	inches	Box Minimum Length	3.938	inches
Box OD Min	5.200	inches	Additional Recut Length	3.938	inches
Box ID	4.000 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

4.5 in. 13.5 lb/ft with 5.25 in. Coupling OD

Pipe Body


Nominal OD	4.500	inches	Plain End Weight	13.04	lb/ft
Nominal Weight	13.50	lb/ft	Drift	3.795	inches
Wall Thickness	0.290	inches	Nominal ID	3.920	inches

Pin Blanking Dimensions



Pin OD Max	4.545	inches	Pin Minimum Length	4.500	inches
Pin OD Min	4.500	inches	Additional Recut Length	2.125	inches
Pin ID	3.920 ± .016	inches			

Box Blanking Dimensions

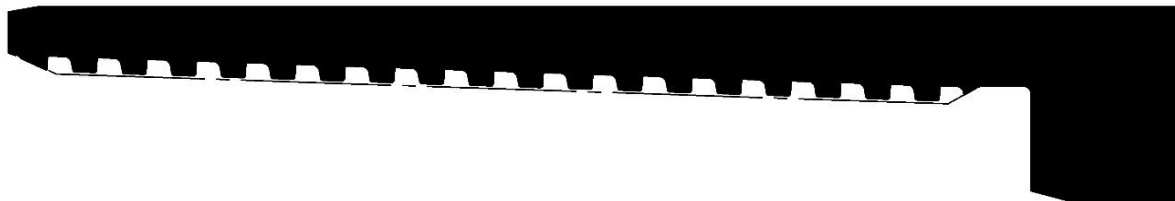

Box OD Max	5.300	inches	Box Minimum Length	3.938	inches
Box OD Min	5.200	inches	Additional Recut Length	3.938	inches
Box ID	3.920 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

4.5 in. 15.1 lb/ft with 5.25 in. Coupling OD

Pipe Body


Nominal OD	4.500	inches	Plain End Weight	14.98	lb/ft
Nominal Weight	15.10	lb/ft	Drift	3.701	inches
Wall Thickness	0.337	inches	Nominal ID	3.826	inches

Pin Blanking Dimensions



Pin OD Max	4.545	inches	Pin Minimum Length	4.500	inches
Pin OD Min	4.500	inches	Additional Recut Length	2.125	inches
Pin ID	3.826 ± .016	inches			

Box Blanking Dimensions

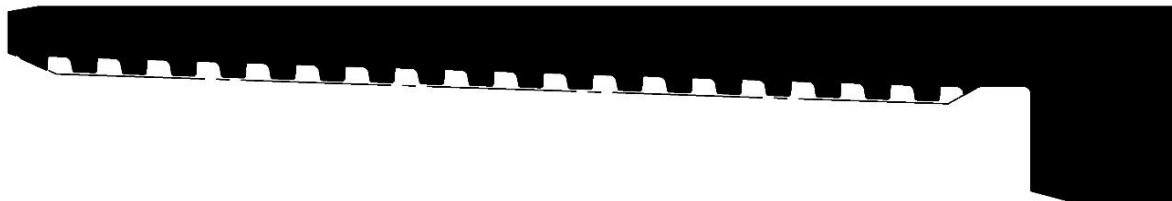

Box OD Max	5.300	inches	Box Minimum Length	3.938	inches
Box OD Min	5.200	inches	Additional Recut Length	3.938	inches
Box ID	3.826 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

5 in. 18 lb/ft with 5.75 in. Coupling OD

Pipe Body


Nominal OD	5.000	inches	Plain End Weight	17.93	lb/ft
Nominal Weight	18.00	lb/ft	Drift	4.151	inches
Wall Thickness	0.362	inches	Nominal ID	4.276	inches

Pin Blanking Dimensions



Pin OD Max	5.050	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.000	inches	Additional Recut Length	2.125	inches
Pin ID	4.276 ± .016	inches			

Box Blanking Dimensions

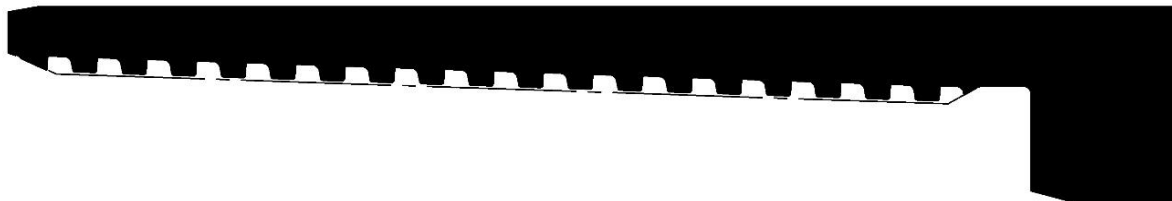

Box OD Max	5.800	inches	Box Minimum Length	4.063	inches
Box OD Min	5.700	inches	Additional Recut Length	4.063	inches
Box ID	4.276 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

5 in. 21.4 lb/ft with 5.75 in. Coupling OD

Pipe Body


Nominal OD	5.000	inches	Plain End Weight	21.30	lb/ft
Nominal Weight	21.40	lb/ft	Drift	4.001	inches
Wall Thickness	0.437	inches	Nominal ID	4.126	inches

Pin Blanking Dimensions



Pin OD Max	5.050	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.000	inches	Additional Recut Length	2.125	inches
Pin ID	4.126 ± .016	inches			

Box Blanking Dimensions

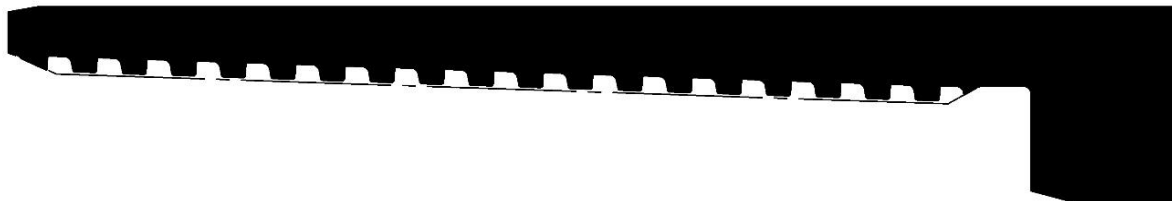

Box OD Max	5.800	inches	Box Minimum Length	4.063	inches
Box OD Min	5.700	inches	Additional Recut Length	4.063	inches
Box ID	4.126 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

5 in. 23.2 lb/ft with 5.75 in. Coupling OD

Pipe Body


Nominal OD	5.000	inches	Plain End Weight	23.09	lb/ft
Nominal Weight	23.20	lb/ft	Drift	3.919	inches
Wall Thickness	0.478	inches	Nominal ID	4.044	inches

Pin Blanking Dimensions



Pin OD Max	5.050	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.000	inches	Additional Recut Length	2.125	inches
Pin ID	4.044 ± .016	inches			

Box Blanking Dimensions

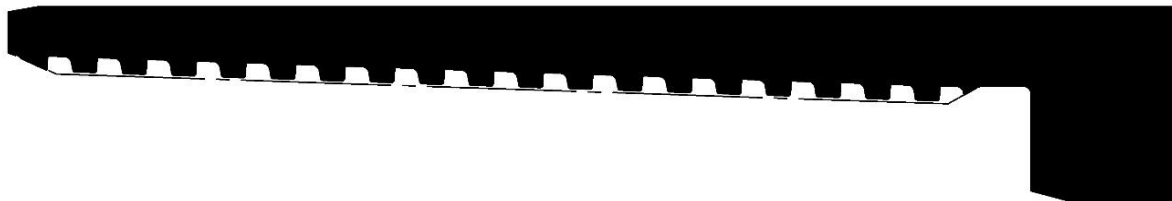

Box OD Max	5.613	inches	Box Minimum Length	4.063	inches
Box OD Min	5.513	inches	Additional Recut Length	4.063	inches
Box ID	4.044 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

5.5 in. 17 lb/ft with 6.3 in. Coupling OD

Pipe Body


Nominal OD	5.500	inches	Plain End Weight	16.87	lb/ft
Nominal Weight	17.00	lb/ft	Drift	4.767	inches
Wall Thickness	0.304	inches	Nominal ID	4.892	inches

Pin Blanking Dimensions



Pin OD Max	5.555	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.500	inches	Additional Recut Length	2.125	inches
Pin ID	4.892 ± .016	inches			

Box Blanking Dimensions

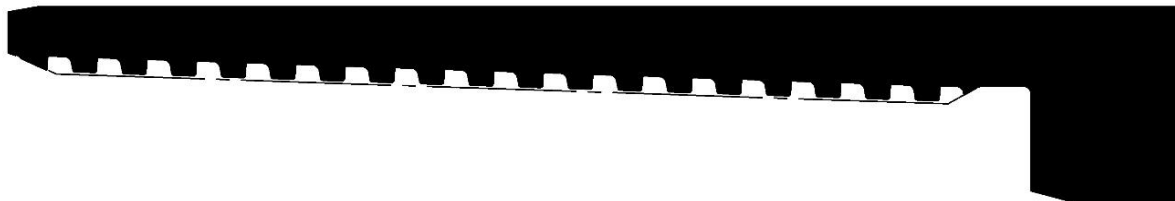

Box OD Max	6.350	inches	Box Minimum Length	4.125	inches
Box OD Min	6.250	inches	Additional Recut Length	4.125	inches
Box ID	4.892 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

5.5 in. 20 lb/ft with 6.3 in. Coupling OD

Pipe Body


Nominal OD	5.500	inches	Plain End Weight	19.81	lb/ft
Nominal Weight	20.00	lb/ft	Drift	4.653	inches
Wall Thickness	0.361	inches	Nominal ID	4.778	inches

Pin Blanking Dimensions



Pin OD Max	5.555	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.500	inches	Additional Recut Length	2.125	inches
Pin ID	4.778 ± .016	inches			

Box Blanking Dimensions

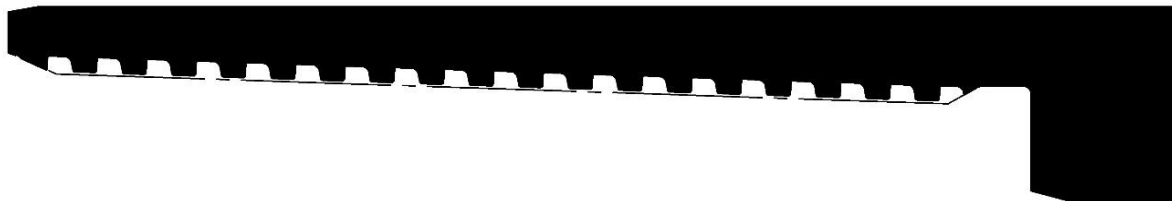

Box OD Max	6.350	inches	Box Minimum Length	4.125	inches
Box OD Min	6.250	inches	Additional Recut Length	4.125	inches
Box ID	4.778 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

5.5 in. 23 lb/ft with 6.3 in. Coupling OD

Pipe Body


Nominal OD	5.500	inches	Plain End Weight	22.54	lb/ft
Nominal Weight	23.00	lb/ft	Drift	4.545	inches
Wall Thickness	0.415	inches	Nominal ID	4.670	inches

Pin Blanking Dimensions



Pin OD Max	5.555	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.500	inches	Additional Recut Length	2.125	inches
Pin ID	4.670 ± .016	inches			

Box Blanking Dimensions

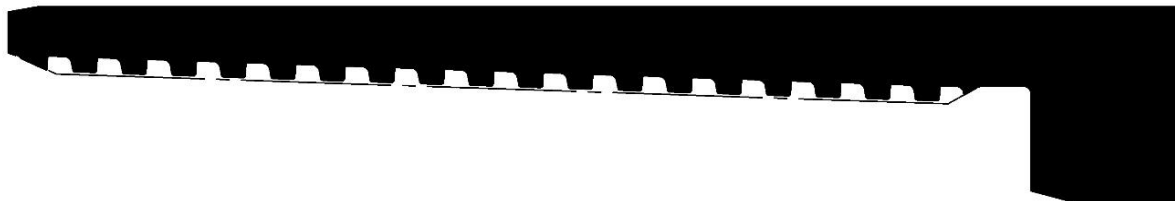

Box OD Max	6.350	inches	Box Minimum Length	4.125	inches
Box OD Min	6.250	inches	Additional Recut Length	4.125	inches
Box ID	4.670 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

5.5 in. 26 lb/ft with 6.3 in. Coupling OD

Pipe Body


Nominal OD	5.500	inches	Plain End Weight	25.55	lb/ft
Nominal Weight	26.00	lb/ft	Drift	4.545	inches
Wall Thickness	0.476	inches	Nominal ID	4.548	inches

Pin Blanking Dimensions



Pin OD Max	5.555	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.500	inches	Additional Recut Length	2.125	inches
Pin ID	4.548 ± .016	inches			

Box Blanking Dimensions

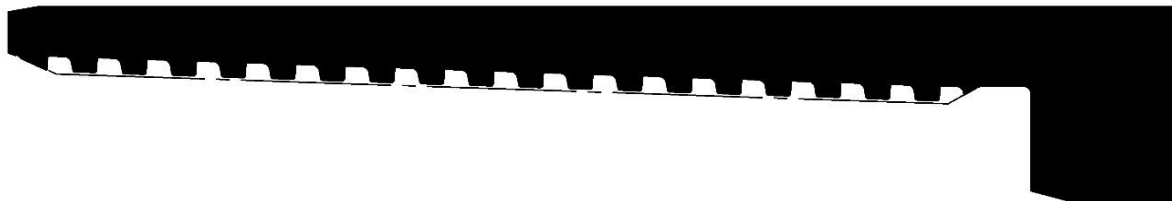

Box OD Max	6.350	inches	Box Minimum Length	4.125	inches
Box OD Min	6.250	inches	Additional Recut Length	4.125	inches
Box ID	4.548 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

6.625 in. 24 lb/ft with 7.475 in. Coupling OD

Pipe Body


Nominal OD	6.625	inches	Plain End Weight	23.58	lb/ft
Nominal Weight	24.00	lb/ft	Drift	5.796	inches
Wall Thickness	0.352	inches	Nominal ID	5.921	inches

Pin Blanking Dimensions



Pin OD Max	6.691	inches	Pin Minimum Length	5.000	inches
Pin OD Min	6.625	inches	Additional Recut Length	2.125	inches
Pin ID	5.921 ± .016	inches			

Box Blanking Dimensions

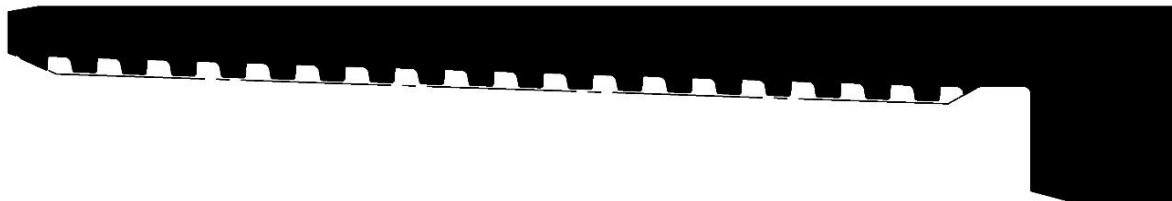

Box OD Max	7.440	inches	Box Minimum Length	4.313	inches
Box OD Min	7.340	inches	Additional Recut Length	4.313	inches
Box ID	5.921 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

1/3/2019



Precision Connections BK-HT Blanking Dimensions

6.625 in. 28 lb/ft with 7.475 in. Coupling OD

Pipe Body


Nominal OD	6.625	inches	Plain End Weight	27.65	lb/ft
Nominal Weight	28.00	lb/ft	Drift	5.666	inches
Wall Thickness	0.417	inches	Nominal ID	5.791	inches

Pin Blanking Dimensions



Pin OD Max	6.691	inches	Pin Minimum Length	5.000	inches
Pin OD Min	6.625	inches	Additional Recut Length	2.125	inches
Pin ID	5.791 ± .016	inches			

Box Blanking Dimensions

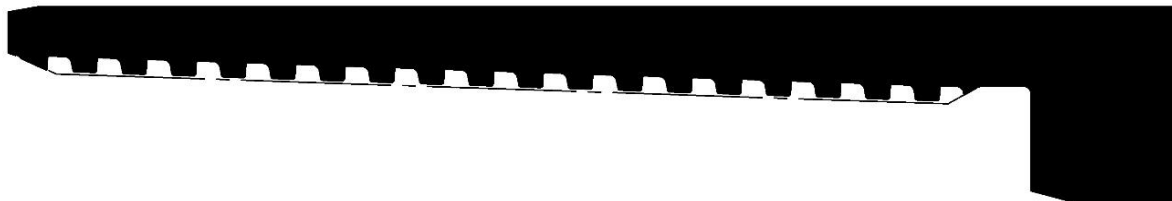

Box OD Max	7.440	inches	Box Minimum Length	4.313	inches
Box OD Min	7.340	inches	Additional Recut Length	4.313	inches
Box ID	5.791 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

1/3/2019



Precision Connections BK-HT Blanking Dimensions

6.625 in. 32 lb/ft with 7.475 in. Coupling OD

Pipe Body


Nominal OD	6.625	inches	Plain End Weight	31.20	lb/ft
Nominal Weight	32.00	lb/ft	Drift	5.550	inches
Wall Thickness	0.475	inches	Nominal ID	5.675	inches

Pin Blanking Dimensions



Pin OD Max	6.691	inches	Pin Minimum Length	5.000	inches
Pin OD Min	6.625	inches	Additional Recut Length	2.125	inches
Pin ID	5.675 ± .016	inches			

Box Blanking Dimensions

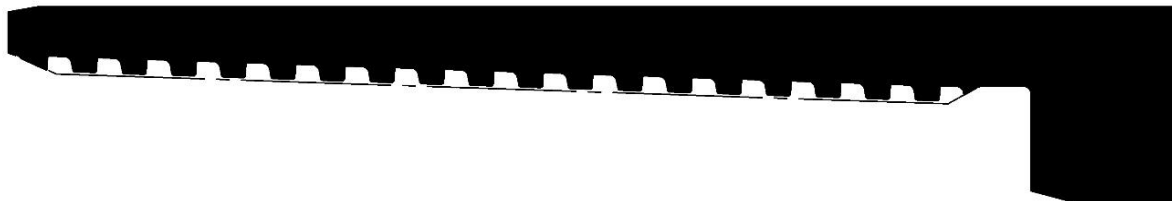

Box OD Max	7.440	inches	Box Minimum Length	4.313	inches
Box OD Min	7.340	inches	Additional Recut Length	4.313	inches
Box ID	5.675 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

1/3/2019



Precision Connections BK-HT Blanking Dimensions

7 in. 23 lb/ft with 7.875 in. Coupling OD

Pipe Body


Nominal OD	7.000	inches	Plain End Weight	22.63	lb/ft
Nominal Weight	23.00	lb/ft	Drift	6.250	inches
Wall Thickness	0.317	inches	Nominal ID	6.366	inches

Pin Blanking Dimensions



Pin OD Max	7.070	inches	Pin Minimum Length	5.250	inches
Pin OD Min	7.000	inches	Additional Recut Length	2.125	inches
Pin ID	6.366 ± .016	inches			

Box Blanking Dimensions

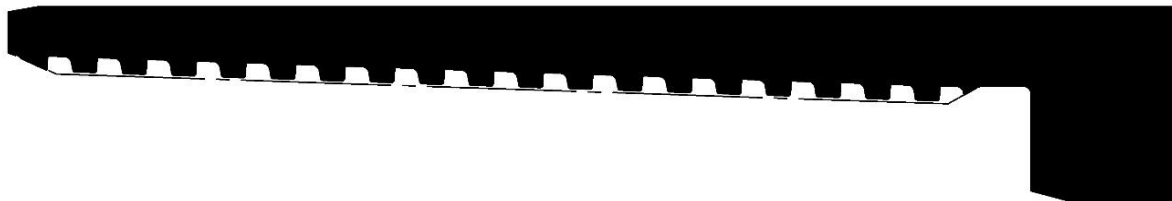

Box OD Max	7.925	inches	Box Minimum Length	4.500	inches
Box OD Min	7.825	inches	Additional Recut Length	4.500	inches
Box ID	6.366 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

7 in. 26 lb/ft with 7.875 in. Coupling OD

Pipe Body


Nominal OD	7.000	inches	Plain End Weight	25.66	lb/ft
Nominal Weight	26.00	lb/ft	Drift	6.151	inches
Wall Thickness	0.362	inches	Nominal ID	6.276	inches

Pin Blanking Dimensions



Pin OD Max	7.070	inches	Pin Minimum Length	5.250	inches
Pin OD Min	7.000	inches	Additional Recut Length	2.125	inches
Pin ID	6.276 ± .016	inches			

Box Blanking Dimensions

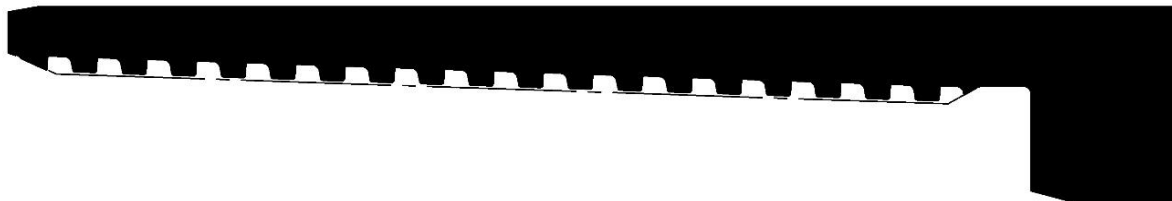

Box OD Max	7.925	inches	Box Minimum Length	4.500	inches
Box OD Min	7.825	inches	Additional Recut Length	4.500	inches
Box ID	6.276 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

7 in. 29 lb/ft with 7.875 in. Coupling OD

Pipe Body


Nominal OD	7.000	inches	Plain End Weight	28.72	lb/ft
Nominal Weight	29.00	lb/ft	Drift	6.125	inches
Wall Thickness	0.408	inches	Nominal ID	6.184	inches

Pin Blanking Dimensions



Pin OD Max	7.070	inches	Pin Minimum Length	5.250	inches
Pin OD Min	7.000	inches	Additional Recut Length	2.125	inches
Pin ID	6.184 ± .016	inches			

Box Blanking Dimensions

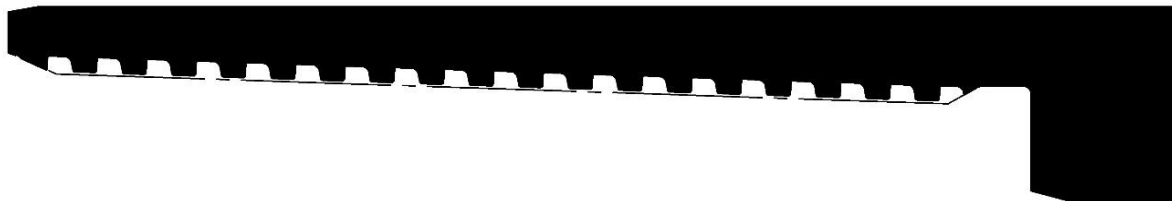

Box OD Max	7.925	inches	Box Minimum Length	4.500	inches
Box OD Min	7.825	inches	Additional Recut Length	4.500	inches
Box ID	6.184 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

7 in. 32 lb/ft with 7.875 in. Coupling OD

Pipe Body

Nominal OD	7.000	inches	Plain End Weight	31.67	lb/ft
Nominal Weight	32.00	lb/ft	Drift	6.000	inches
Wall Thickness	0.453	inches	Nominal ID	6.094	inches

Pin Blanking Dimensions



Pin OD Max	7.070	inches	Pin Minimum Length	5.250	inches
Pin OD Min	7.000	inches	Additional Recut Length	2.125	inches
Pin ID	6.094 ± .016	inches			

Box Blanking Dimensions



Box OD Max	7.925	inches	Box Minimum Length	4.500	inches
Box OD Min	7.825	inches	Additional Recut Length	4.500	inches
Box ID	6.094 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

7.625 in. 26.4 lb/ft with 8.5 in. Coupling OD

Pipe Body


Nominal OD	7.625	inches	Plain End Weight	25.56	lb/ft
Nominal Weight	26.40	lb/ft	Drift	6.844	inches
Wall Thickness	0.328	inches	Nominal ID	6.969	inches

Pin Blanking Dimensions



Pin OD Max	7.701	inches	Pin Minimum Length	5.250	inches
Pin OD Min	7.625	inches	Additional Recut Length	2.125	inches
Pin ID	6.969 ± .016	inches			

Box Blanking Dimensions

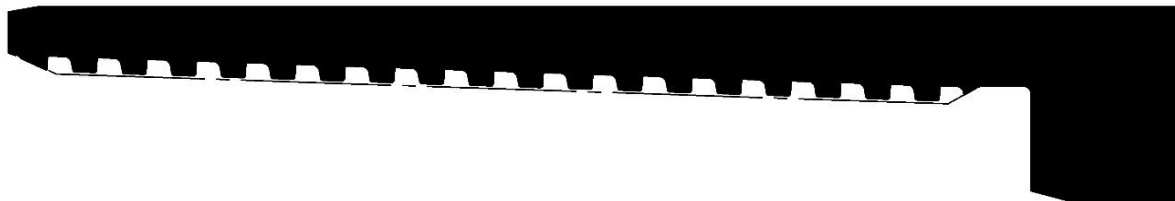

Box OD Max	8.550	inches	Box Minimum Length	4.688	inches
Box OD Min	8.450	inches	Additional Recut Length	4.688	inches
Box ID	6.969 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

7.625 in. 29.7 lb/ft with 8.5 in. Coupling OD

Pipe Body


Nominal OD	7.625	inches	Plain End Weight	29.04	lb/ft
Nominal Weight	29.70	lb/ft	Drift	6.750	inches
Wall Thickness	0.375	inches	Nominal ID	6.875	inches

Pin Blanking Dimensions



Pin OD Max	7.701	inches	Pin Minimum Length	5.250	inches
Pin OD Min	7.625	inches	Additional Recut Length	2.125	inches
Pin ID	6.875 ± .016	inches			

Box Blanking Dimensions

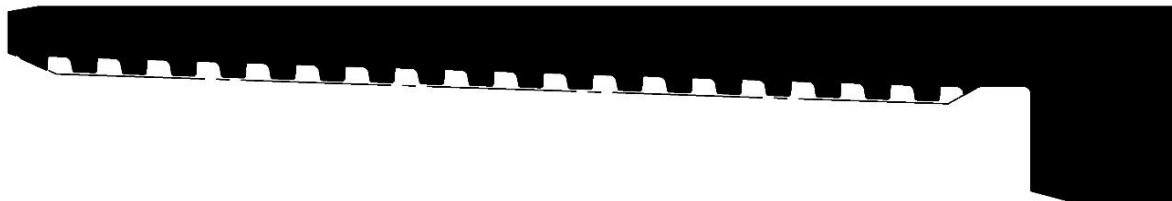

Box OD Max	8.550	inches	Box Minimum Length	4.688	inches
Box OD Min	8.450	inches	Additional Recut Length	4.688	inches
Box ID	6.875 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT SC Blanking Dimensions

7.625 in. 29.7 lb/ft with 8 in. Coupling OD

Pipe Body


Nominal OD	7.625	inches	Plain End Weight	29.06	lb/ft
Nominal Weight	29.70	lb/ft	Drift	6.750	inches
Wall Thickness	0.375	inches	Nominal ID	6.875	inches

Pin Blanking Dimensions



Pin OD Max	7.701	inches	Pin Minimum Length	5.250	inches
Pin OD Min	7.625	inches	Additional Recut Length	2.125	inches
Pin ID	6.875 ± .016	inches			

Box Blanking Dimensions

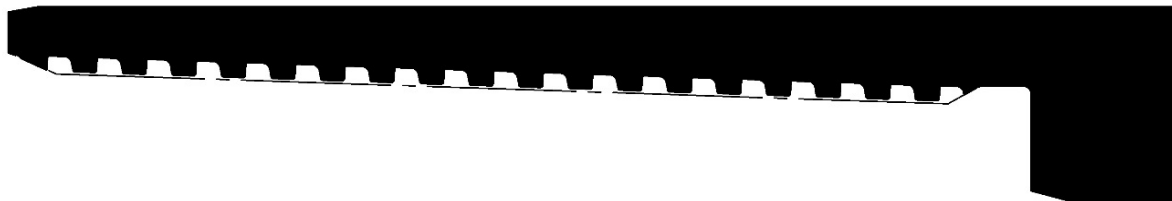

Box OD Max	8.050	inches	Box Minimum Length	4.688	inches
Box OD Min	7.950	inches	Additional Recut Length	4.688	inches
Box ID	6.875 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/9/2019



Precision Connections BK-HT SC Blanking Dimensions

7.625 in. 29.7 lb/ft with 8.25 in. Coupling OD

Pipe Body

Nominal OD	7.625	inches	Plain End Weight	29.06	lb/ft
Nominal Weight	29.70	lb/ft	Drift	6.750	inches
Wall Thickness	0.375	inches	Nominal ID	6.875	inches

Pin Blanking Dimensions



Pin OD Max	7.701	inches	Pin Minimum Length	5.250	inches
Pin OD Min	7.625	inches	Additional Recut Length	2.125	inches
Pin ID	6.875 ± .016	inches			

Box Blanking Dimensions



Box OD Max	8.050	inches	Box Minimum Length	4.688	inches
Box OD Min	7.950	inches	Additional Recut Length	4.688	inches
Box ID	6.875 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/9/2019



Precision Connections BK-HT Blanking Dimensions

7.625 in. 33.7 lb/ft with 8.5 in. Coupling OD

Pipe Body


Nominal OD	7.625	inches	Plain End Weight	33.04	lb/ft
Nominal Weight	33.70	lb/ft	Drift	6.640	inches
Wall Thickness	0.430	inches	Nominal ID	6.765	inches

Pin Blanking Dimensions



Pin OD Max	7.701	inches	Pin Minimum Length	5.250	inches
Pin OD Min	7.625	inches	Additional Recut Length	2.125	inches
Pin ID	6.765 ± .016	inches			

Box Blanking Dimensions

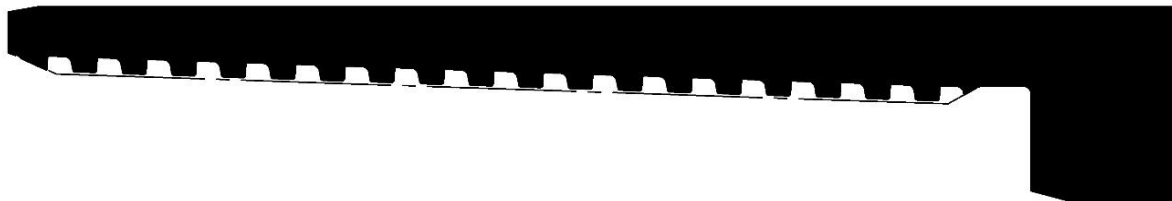

Box OD Max	8.550	inches	Box Minimum Length	4.688	inches
Box OD Min	8.450	inches	Additional Recut Length	4.688	inches
Box ID	6.765 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK-HT Blanking Dimensions

7.625 in. 39 lb/ft with 8.5 in. Coupling OD

Pipe Body


Nominal OD	7.625	inches	Plain End Weight	38.05	lb/ft
Nominal Weight	39.00	lb/ft	Drift	6.500	inches
Wall Thickness	0.500	inches	Nominal ID	6.625	inches

Pin Blanking Dimensions



Pin OD Max	7.701	inches	Pin Minimum Length	5.250	inches
Pin OD Min	7.625	inches	Additional Recut Length	2.125	inches
Pin ID	6.625 ± .016	inches			

Box Blanking Dimensions

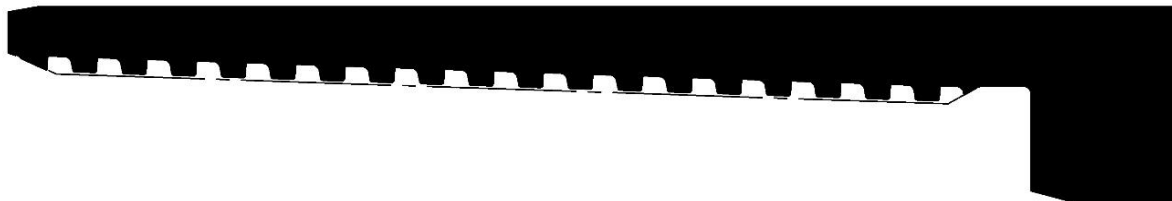

Box OD Max	8.550	inches	Box Minimum Length	4.688	inches
Box OD Min	8.450	inches	Additional Recut Length	4.688	inches
Box ID	6.625 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018