



PRECISION


Keeping You Connected.



FX SEMI-PREMIUM

FIELD TESTED. FIELD PROVEN.

PRECISION
Keeping You Connected.

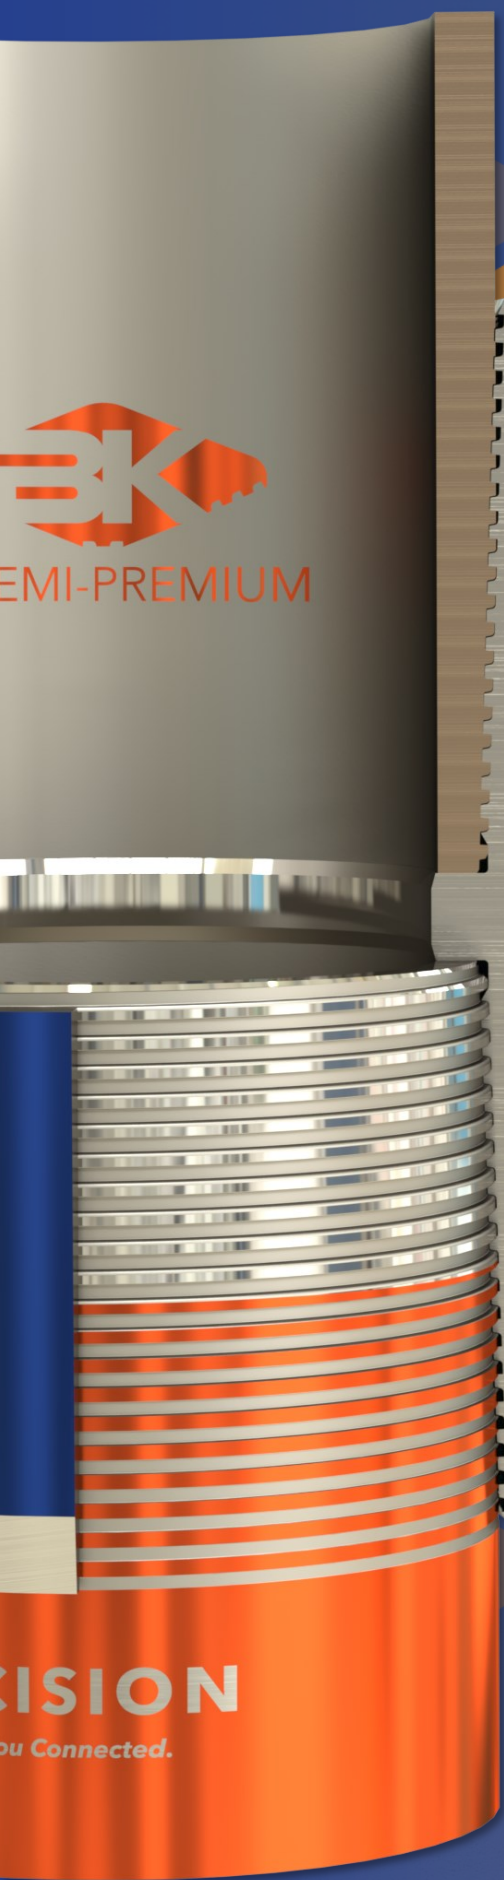

FX SEMI-PREMIUM

FIELD TESTED. FIELD PROVEN.

A STRONGER COUPLING


The FX coupling shoulder provides a positive torque-stop which promotes good make ups and it's immune to coupling turning issues. Stresses from the mill end and field end are isolated from one another for better over-torque protection.

MORE EFFICIENT

Better threading techniques and coupling coatings allow for a quick and low cost installation, reducing the run time per well.

THICKER COUPLING

The BK-FX's thicker coupling handles higher frac pressures and supports thicker pipe wall with 100% matched strength. It's thicker coupling with a larger OD increases strength and torque resistance. The BK-FX also provides more strength when utilizing high-collapse or enhanced burst strength pipe.

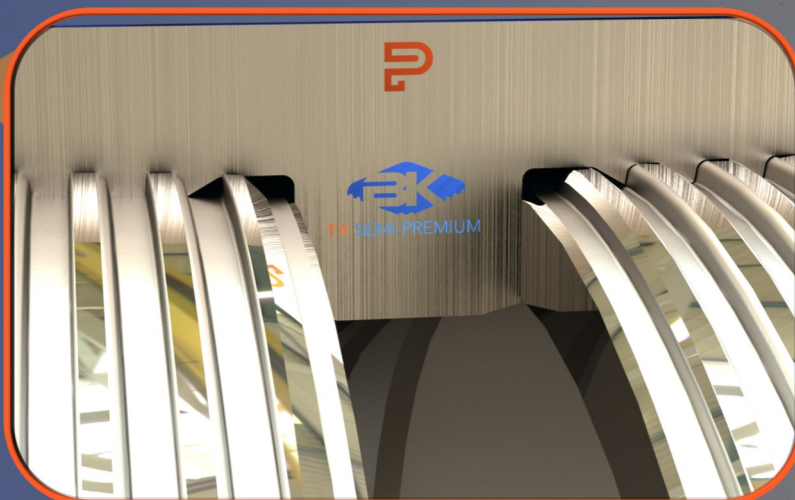

ISION
ou Connected.



FX SEMI-PREMIUM

THE FX'S THICKER COUPLING AND INTEGRAL SHOULDER HANDLES HIGHER FRAC PRESSURES AND SUPPORTS THICKER PIPE WALLS WITH 100% MATCHED STRENGTH.

The BK-FX uses a thicker coupling with a larger OD and integral shoulder to increase strength and torque resistance. The BK-FX is also 100% buttress compatible.



FX USES A MODIFIED BUTTRESS THREAD

Tighter and better sealing from a minimized thread gap. Tighter threads keep the pin nose seal stable and firmly in place.

PRECISION

Keeping You Connected.



FX SEMI-PREMIUM

FIELD TESTED. FIELD PROVEN.



SIZE	WEIGHT	WALL	DRIFT DIAMETER	GRADE	COUPL. DIAMETER	PIPE & CONN. ID	COUPL. LENGTH	MAKE UP LOSS	TORQUE (ft-lbf)		YIELD STRENGTH (x 1000lbs)		YIELD PRESSURE (PSI)	
									OPTIMUM	YIELD	TENSION	COMPR.	INTERNAL	COLLAPSE
4.5	11.60	0.250	3.875	HC-P110	5.250	4.000	7.875	3.938	4,150	11,500	367	367	10,690	8,830
4.5	11.60	0.250	3.875	P110 EB	5.250	4.000	7.875	3.938	4,700	13,050	417	417	12,150	8,830
4.5	13.50	0.290	3.795	HC-P110	5.250	3.920	7.875	3.938	5,400	15,000	422	422	12,410	12,290
4.5	13.50	0.290	3.795	P110 EB	5.250	3.920	7.875	3.938	6,150	17,050	479	479	14,100	12,290
4.5	15.10	0.337	3.701	HC-P110	5.250	3.826	7.875	3.938	6,850	19,000	485	485	14,420	16,490
4.5	15.10	0.337	3.701	P110 EB	5.250	3.826	7.875	3.938	7,800	21,600	551	551	16,380	16,490
5	18.00	0.362	4.151	HC-P110	5.750	4.276	8.125	4.063	7,550	21,000	580	580	13,940	15,490
5	18.00	0.362	4.151	P110 EB	5.750	4.276	8.125	4.063	8,600	23,850	659	659	15,840	15,490
5	21.40	0.437	4.001	HC-P110	5.750	4.126	8.125	4.063	9,150	25,450	613	613	16,820	20,180
5	21.40	0.437	4.001	P110 EB	5.750	4.126	8.125	4.063	10,400	28,900	783	783	19,120	20,180
5.5	17.00	0.304	4.767	HC-P110	6.300	4.892	8.250	4.125	9,550	26,500	546	546	10,640	8,730
5.5	17.00	0.304	4.767	P110 EB	6.300	4.892	8.250	4.125	10,850	30,100	620	620	12,090	8,730
5.5	20.00	0.361	4.653	HC-P110	6.300	4.778	8.250	4.125	11,500	32,000	641	641	12,640	12,770
5.5	20.00	0.361	4.653	P110 EB	6.300	4.778	8.250	4.125	13,100	36,350	729	729	14,360	12,770
5.5	23.00	0.415	4.545	HC-P110	6.300	4.670	8.250	4.125	14,050	39,000	729	664	14,530	16,720
5.5	23.00	0.415	4.545	P110 EB	6.300	4.670	8.250	4.125	15,950	44,300	829	829	16,510	16,720
7	26.00	0.362	6.151	HC-P110	7.875	6.276	9.000	4.500	12,800	35,500	830	830	9,960	7,540
7	26.00	0.362	6.151	P110 EB	7.875	6.276	9.000	4.500	14,550	40,350	944	944	11,310	7,540
7	29.00	0.408	6.125	HC-P110	7.875	6.184	9.000	4.500	15,300	42,500	929	929	11,220	9,810
7	29.00	0.408	6.125	P110 EB	7.875	6.184	9.000	4.500	17,400	48,300	1056	1056	12,750	9,810
7	32.00	0.453	6.000	HC-P110	7.875	6.094	9.000	4.500	17,650	49,000	1025	1025	12,460	12,400
7	32.00	0.453	6.000	P110 EB	7.875	6.094	9.000	4.500	20,050	55,700	1165	1165	14,160	12,400

CONTACT

Precision, LLC
 11200 Mesa Dr.
 Houston, Texas 77078
 O: 713.678.8900

Technical Support

832.405.3711
 mike.nations@precision-llc.com

Precision-llc.com