

Precision Connections BK Special Clearance
9.625 in. 36 lb/ft J-55 with 10.125 in. Coupling OD

Pipe Body

Nominal OD	9.625	inches
Nominal Weight	36.00	lb/ft
Wall Thickness	0.352	inches
Plain End Weight	34.89	lb/ft
Drift	8.765	inches
Nominal ID	8.921	inches
Grade	J-55	
Min Yield	55,000	lbf/in ²
Min Tensile	75,000	lbf/in ²
Critical Section Area	10.254	in ²
Pipe Body Yield Strength	564	kips
Min Internal Yield Pressure	3,520	psi
Collapse Pressure	2,020	psi

Connection

Coupling OD	10.125	inches
Coupling Length	9.625	inches
Make Up Loss	4.813	inches
Coupling Critical Area	10.409	in ²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	564	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	24.9	° / 100 ft
Min Make Up Torque	7,300	ft-lbs
Yield Torque	28,000	ft-lbs



Keeping You Connected.




SEMI
PREMIUMCONNECTIONS
FIELD TESTED. FIELD PROVEN.

Torque Data Sheet - Precision Connections BK Special Clearance 9.625 in. 36 lb/ft J-55 with 10.125 in. Coupling OD

Min Make Up Torque	7,300	ft-lbs	Max Operating Torque	23,800	ft-lbs
Max Make Up Torque	21,000	ft-lbs	Yield Torque	28,000	ft-lbs
Optimum Torque	10,100	ft-lbs			

Representative Torque Turn Graph

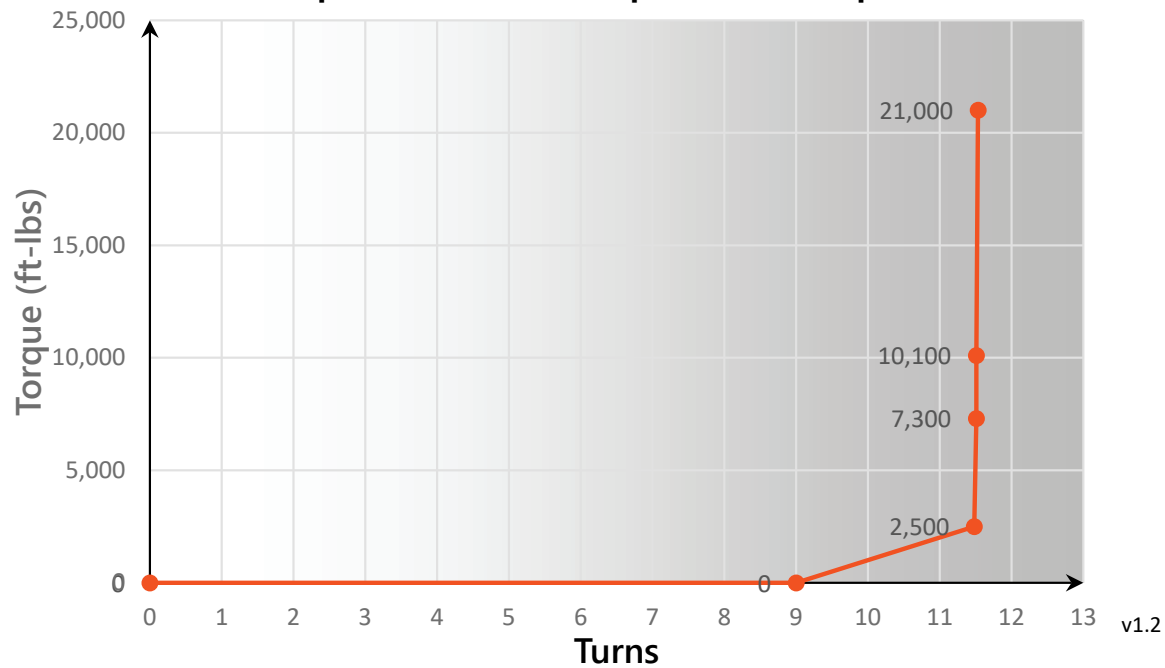

v1.2

3/26/2020