

## Precision Connections BK-HT

5 in. 21.4 lb/ft P110 EB with 5.75 in. Coupling OD

### Pipe Body

|                             |         |                     |
|-----------------------------|---------|---------------------|
| Nominal OD                  | 5.000   | inches              |
| Nominal Weight              | 21.40   | lb/ft               |
| Wall Thickness              | 0.437   | inches              |
| Plain End Weight            | 21.32   | lb/ft               |
| Drift                       | 4.001   | inches              |
| Nominal ID                  | 4.126   | inches              |
| Grade                       | P110 EB |                     |
| Min Yield                   | 125,000 | lbf/in <sup>2</sup> |
| Min Tensile                 | 130,000 | lbf/in <sup>2</sup> |
| Critical Section Area       | 6.264   | in <sup>2</sup>     |
| Pipe Body Yield Strength    | 783     | klps                |
| Min Internal Yield Pressure | 19,120  | psi                 |
| Collapse Pressure           | 20,180  | psi                 |

### Connection

|                          |        |                                                                                              |
|--------------------------|--------|----------------------------------------------------------------------------------------------|
| Coupling OD              | 5.750  | inches                                                                                       |
| Coupling Length          | 8.125  | inches                                                                                       |
| Make Up Loss             | 4.063  | inches                                                                                       |
| Coupling Critical Area   | 7.240  | in <sup>2</sup>                                                                              |
| Internal Pressure Rating | 100%   |                                                                                              |
| External Pressure Rating | 100%   |                                                                                              |
| Tension Efficiency       | 100%   |                                                                                              |
| Connection Strength      | 783    | klps                                                                                         |
| Compression Efficiency   | 100%   |                                                                                              |
| Joint Strength           | 761    | klps                                                                                         |
| Uniaxial Bend Rating     | 99.7   | ° / 100 ft                                                                                   |
| Min Make Up Torque       | 7,500  | ft-lbs  |
| Yield Torque             | 28,900 | ft-lbs  |



## Torque Data Sheet - Precision Connections BK-HT

5 in. 21.4 lb/ft P110 EB with 5.75 in. Coupling OD

Min Make Up Torque 7,500 ft-lbs


Max Make Up Torque 21,700 ft-lbs

Optimum Torque 10,400 ft-lbs

Max Operating Torque 24,600 ft-lbs

Yield Torque 28,900 ft-lbs

### Representative Torque Turn Graph

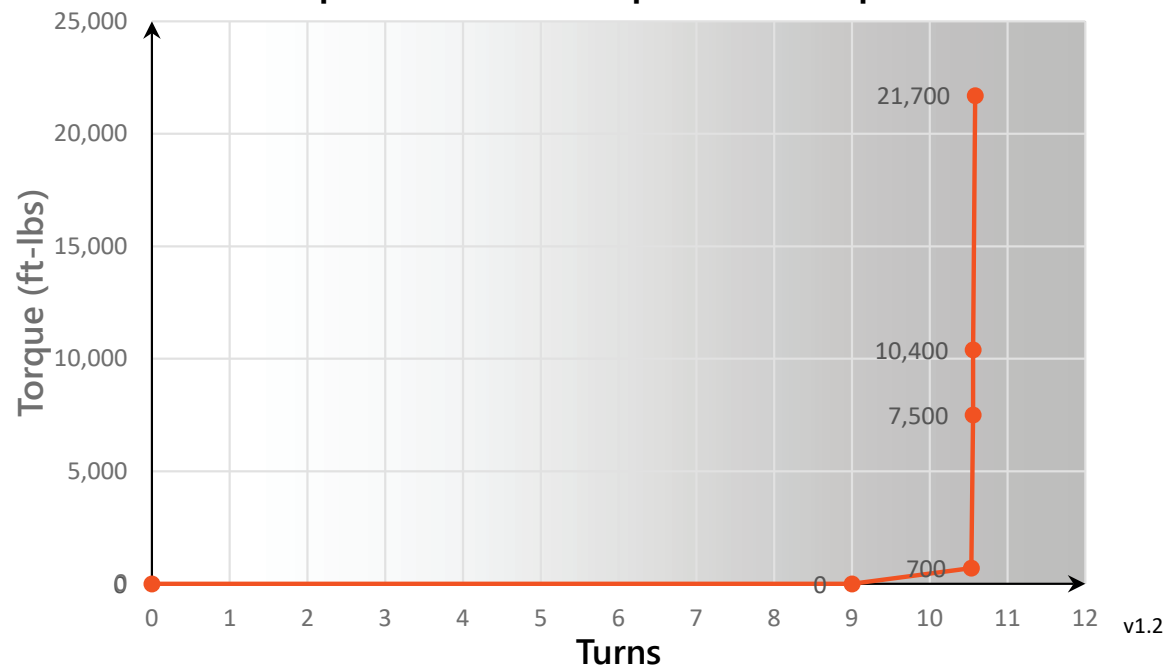

v1.2

8/24/2020