



InterLock Coupled 5.000 in. 18.00 lb/ft P110 EB

Pipe Body


Nominal OD	5.000	inches
Nominal Weight	18.00	lb/ft
Wall Thickness	0.362	inches
Plain End Weight	17.93	lb/ft
Drift	4.151	inches
Nominal ID	4.276	inches
Grade	P110 EB	
Min Yield	125,000	lb/in ²
Min Tensile	130,000	lb/in ²
Critical Section Area	5.275	in ²
Pipe Body Yield Strength	659	kips
Min Internal Yield Pressure	15,840	psi
Collapse Pressure	15,490	psi

Connection

Coupling OD	5.800	inches
Connection ID	4.276	inches
Coupling Length	8.716	inches
Make Up Loss	3.876	inches
Coupling CSA	8.115	in ²
Pin CSA	5.275	in ²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	659	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	98.8	° / 100 ft

Make-up Values

Minimum Torque	12,000	ft-lbs
Optimum Torque	14,000	ft-lbs
Maximum Torque	16,000	ft-lbs
Operating Torque	28,800	ft-lbs
Yield Torque	36,000	ft-lbs

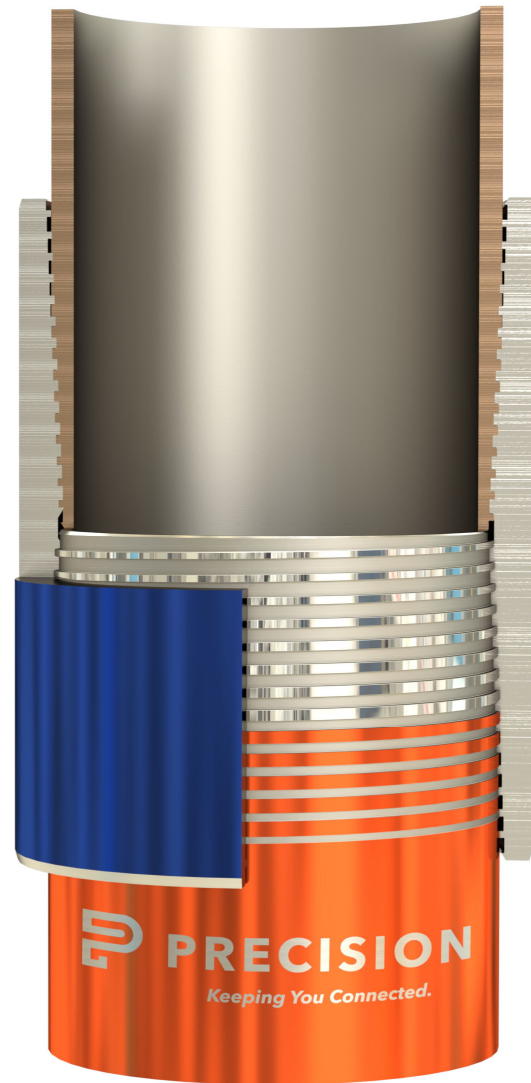

This documentation contains confidential and proprietary information not to be reproduced or divulged in whole or in part to anyone outside of your company without prior written authorization from Precision Connections, LLC, and such documentation and information is provided to you upon such conditions of confidentiality.