



InterLock Coupled 5.500 in. 23.00 lb/ft P110 EB

Pipe Body


Nominal OD	5.500	inches
Nominal Weight	23.00	lb/ft
Wall Thickness	0.415	inches
Plain End Weight	22.54	lb/ft
Drift	4.545	inches
Nominal ID	4.670	inches
Grade	P110 EB	
Min Yield	125,000	lb/in ²
Min Tensile	130,000	lb/in ²
Critical Section Area	6.630	in ²
Pipe Body Yield Strength	829	kips
Min Internal Yield Pressure	16,510	psi
Collapse Pressure	16,720	psi

Connection

Coupling OD	6.300	inches
Connection ID	4.670	inches
Coupling Length	8.691	inches
Make Up Loss	3.839	inches
Coupling CSA	8.855	in ²
Pin CSA	6.630	in ²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	829	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	91.0	° / 100 ft

Make-up Values

Minimum Torque	16,000	ft-lbs
Optimum Torque	18,000	ft-lbs
Maximum Torque	20,000	ft-lbs
Operating Torque	44,000	ft-lbs
Yield Torque	55,000	ft-lbs

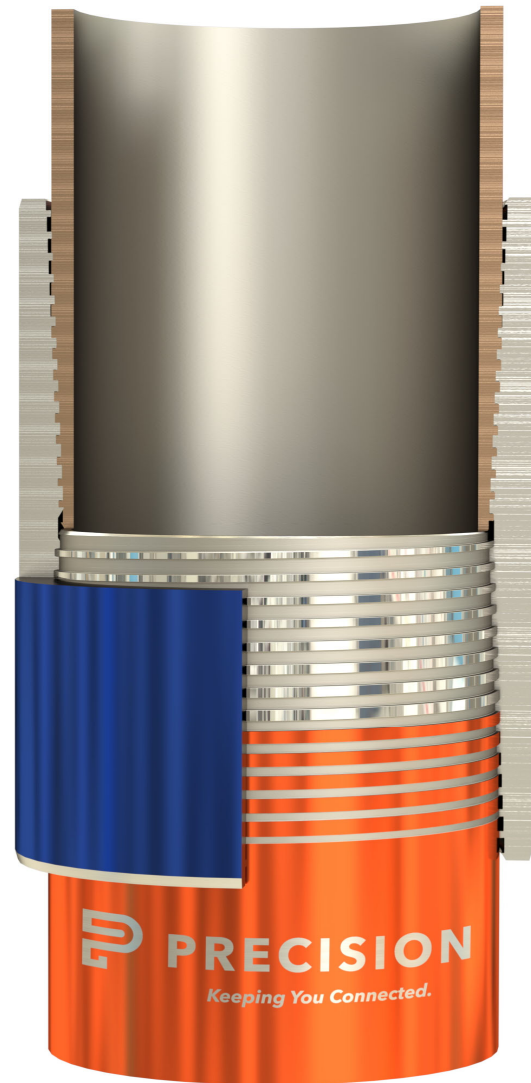

This documentation contains confidential and proprietary information not to be reproduced or divulged in whole or in part to anyone outside of your company without prior written authorization from Precision Connections, LLC, and such documentation and information is provided to you upon such conditions of confidentiality.