



7 in. 26 lb/ft P110 EB with 7.875 in. Coupling OD

Pipe Body

Nominal OD	7.000	inches
Nominal Weight	26.00	lb/ft
Wall Thickness	0.362	inches
Plain End Weight	25.69	lb/ft
Drift	6.151	inches
Nominal ID	6.276	inches
Grade	P110 EB	
Min Yield	125,000	lbf/in ²
Min Tensile	130,000	lbf/in ²
Critical Section Area	7.549	in ²
Pipe Body Yield Strength	944	kips
Min Internal Yield Pressure	11,310	psi
Collapse Pressure	7,540	psi

Connection

Coupling OD	7.875	inches
Coupling Length	11.463	inches
Make Up Loss	5.419	inches
Critical Section Area	7.549	in ²
Internal Pressure Rating	100%	
External Pressure Rating	100%	
Tension Efficiency	100%	
Connection Strength	944	kips
Compression Efficiency	100%	
Uniaxial Bend Rating	72.8	° / 100 ft
Min Make Up Torque	8,850	ft-lbs
Yield Torque	34,100	ft-lbs






Torque Data Sheet - HOSS

7 in. 26 lb/ft P110 EB with 7.875 in. Coupling OD

Min Make Up Torque	8,850	ft-lbs	Max Operating Torque	29,000	ft-lbs
Max Make Up Torque	25,550	ft-lbs	Yield Torque	34,100	ft-lbs
Optimum Torque	12,250	ft-lbs			

Representative Torque Turn Graph

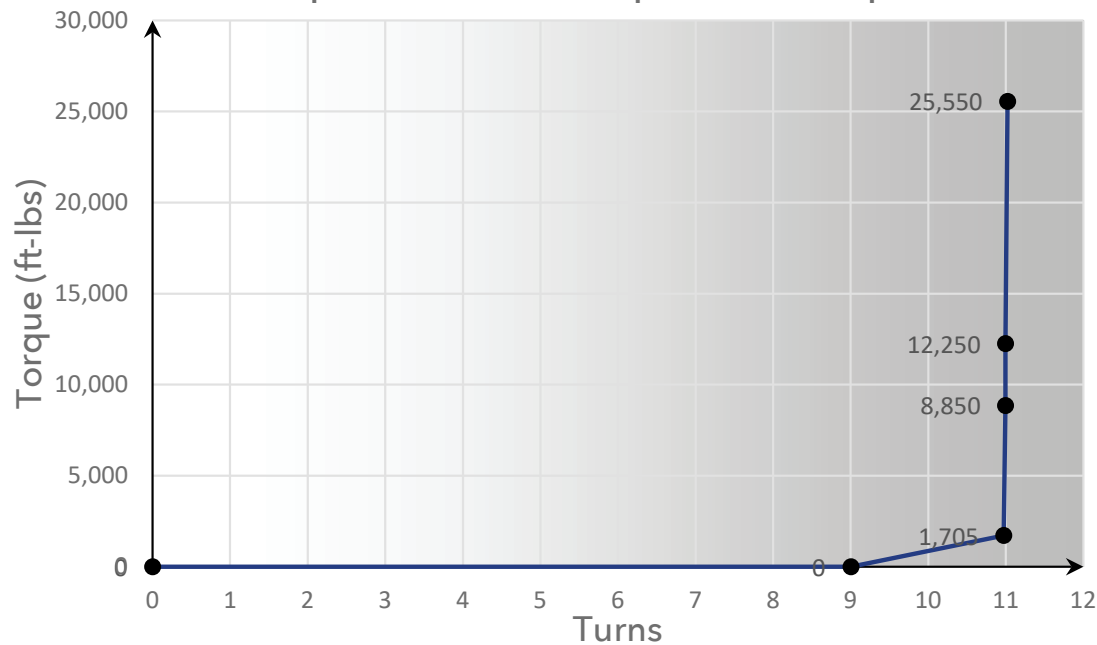

v1.1

4/3/2025