



Precision Connections BK Blanking Dimensions

4.5 in. 11.6 lb/ft with 5 in. Coupling OD

Pipe Body


Nominal OD	4.500	inches	Plain End Weight	11.35	lb/ft
Nominal Weight	11.60	lb/ft	Drift	3.875	inches
Wall Thickness	0.250	inches	Nominal ID	4.000	inches

Pin Blanking Dimensions



Pin OD Max	4.545	inches	Pin Minimum Length	4.500	inches
Pin OD Min	4.500	inches	Additional Recut Length	2.125	inches
Pin ID	4.000 ± .016	inches			

Box Blanking Dimensions

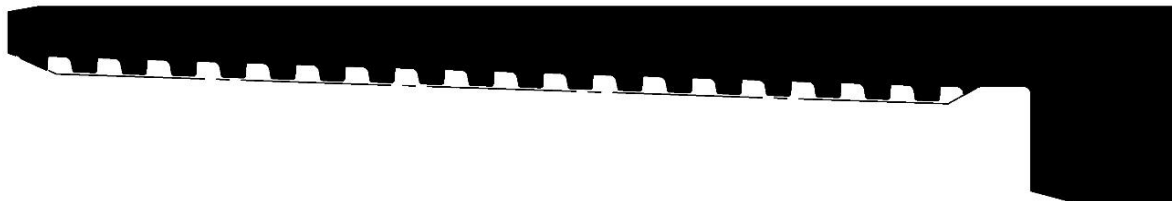

Box OD Max	5.050	inches	Box Minimum Length	3.938	inches
Box OD Min	4.950	inches	Additional Recut Length	3.938	inches
Box ID	4.000 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

4.5 in. 13.5 lb/ft with 5 in. Coupling OD

Pipe Body


Nominal OD	4.500	inches	Plain End Weight	13.04	lb/ft
Nominal Weight	13.50	lb/ft	Drift	3.795	inches
Wall Thickness	0.290	inches	Nominal ID	3.920	inches

Pin Blanking Dimensions



Pin OD Max	4.545	inches	Pin Minimum Length	4.500	inches
Pin OD Min	4.500	inches	Additional Recut Length	2.125	inches
Pin ID	3.920 ± .016	inches			

Box Blanking Dimensions

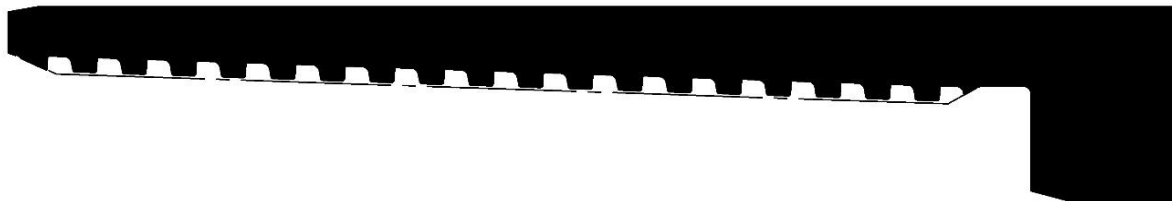

Box OD Max	5.050	inches	Box Minimum Length	3.938	inches
Box OD Min	4.950	inches	Additional Recut Length	3.938	inches
Box ID	3.920 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

4.5 in. 15.1 lb/ft with 5 in. Coupling OD

Pipe Body

Nominal OD	4.500	inches	Plain End Weight	14.98	lb/ft
Nominal Weight	15.10	lb/ft	Drift	3.701	inches
Wall Thickness	0.337	inches	Nominal ID	3.826	inches

Pin Blanking Dimensions



Pin OD Max	4.545	inches	Pin Minimum Length	4.500	inches
Pin OD Min	4.500	inches	Additional Recut Length	2.125	inches
Pin ID	3.826 ± .016	inches			

Box Blanking Dimensions



Box OD Max	5.050	inches	Box Minimum Length	3.938	inches
Box OD Min	4.950	inches	Additional Recut Length	3.938	inches
Box ID	3.826 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

5 in. 18 lb/ft with 5.563 in. Coupling OD

Pipe Body

Nominal OD	5.000	inches	Plain End Weight	17.93	lb/ft
Nominal Weight	18.00	lb/ft	Drift	4.151	inches
Wall Thickness	0.362	inches	Nominal ID	4.276	inches

Pin Blanking Dimensions



Pin OD Max	5.050	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.000	inches	Additional Recut Length	2.125	inches
Pin ID	4.276 ± .016	inches			

Box Blanking Dimensions



Box OD Max	5.613	inches	Box Minimum Length	4.063	inches
Box OD Min	5.513	inches	Additional Recut Length	4.063	inches
Box ID	4.276 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

5 in. 21.4 lb/ft with 5.563 in. Coupling OD

Pipe Body


Nominal OD	5.000	inches	Plain End Weight	21.30	lb/ft
Nominal Weight	21.40	lb/ft	Drift	4.001	inches
Wall Thickness	0.437	inches	Nominal ID	4.126	inches

Pin Blanking Dimensions



Pin OD Max	5.050	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.000	inches	Additional Recut Length	2.125	inches
Pin ID	4.126 ± .016	inches			

Box Blanking Dimensions

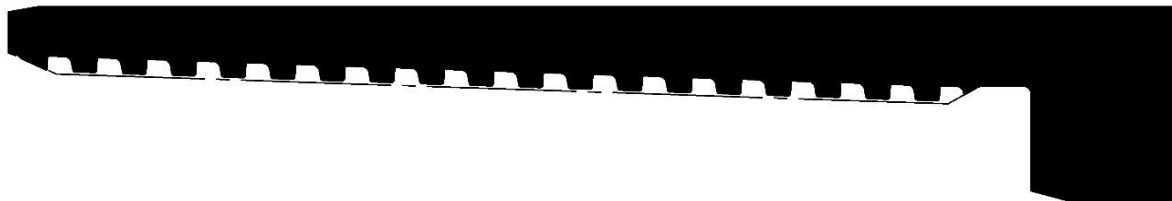

Box OD Max	5.613	inches	Box Minimum Length	4.063	inches
Box OD Min	5.513	inches	Additional Recut Length	4.063	inches
Box ID	4.126 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

5.5 in. 17 lb/ft with 6.05 in. Coupling OD

Pipe Body

Nominal OD	5.500	inches	Plain End Weight	16.87	lb/ft
Nominal Weight	17.00	lb/ft	Drift	4.767	inches
Wall Thickness	0.304	inches	Nominal ID	4.892	inches

Pin Blanking Dimensions



Pin OD Max	5.555	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.500	inches	Additional Recut Length	2.125	inches
Pin ID	4.892 ± .016	inches			

Box Blanking Dimensions



Box OD Max	6.250	inches	Box Minimum Length	4.125	inches
Box OD Min	6.150	inches	Additional Recut Length	4.125	inches
Box ID	4.892 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

5.5 in. 20 lb/ft with 6.05 in. Coupling OD

Pipe Body


Nominal OD	5.500	inches	Plain End Weight	19.81	lb/ft
Nominal Weight	20.00	lb/ft	Drift	4.653	inches
Wall Thickness	0.361	inches	Nominal ID	4.778	inches

Pin Blanking Dimensions



Pin OD Max	5.555	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.500	inches	Additional Recut Length	2.125	inches
Pin ID	4.778 ± .016	inches			

Box Blanking Dimensions

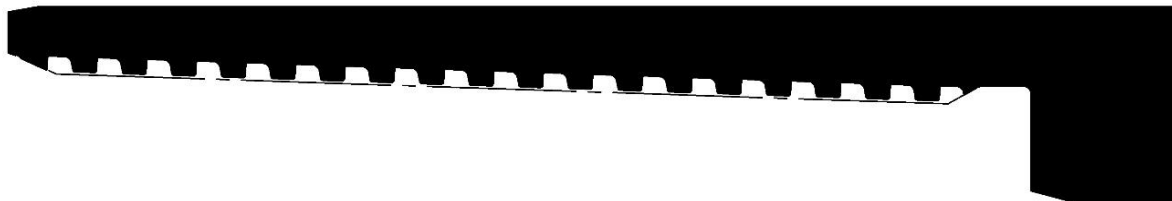

Box OD Max	6.250	inches	Box Minimum Length	4.125	inches
Box OD Min	6.150	inches	Additional Recut Length	4.125	inches
Box ID	4.778 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

5.5 in. 23 lb/ft with 6.05 in. Coupling OD

Pipe Body


Nominal OD	5.500	inches	Plain End Weight	22.54	lb/ft
Nominal Weight	23.00	lb/ft	Drift	4.545	inches
Wall Thickness	0.415	inches	Nominal ID	4.670	inches

Pin Blanking Dimensions



Pin OD Max	5.555	inches	Pin Minimum Length	4.750	inches
Pin OD Min	5.500	inches	Additional Recut Length	2.125	inches
Pin ID	4.670 ± .016	inches			

Box Blanking Dimensions

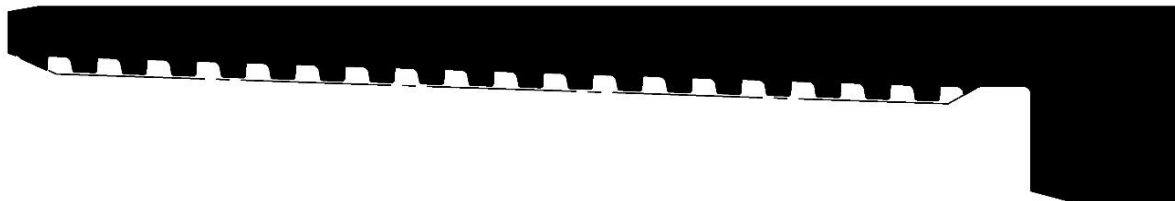

Box OD Max	6.250	inches	Box Minimum Length	4.125	inches
Box OD Min	6.150	inches	Additional Recut Length	4.125	inches
Box ID	4.670 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

6.625 in. 24 lb/ft with 7.39 in. Coupling OD

Pipe Body

Nominal OD	6.625	inches	Plain End Weight	23.58	lb/ft
Nominal Weight	24.00	lb/ft	Drift	5.796	inches
Wall Thickness	0.352	inches	Nominal ID	5.921	inches

Pin Blanking Dimensions



Pin OD Max	6.691	inches	Pin Minimum Length	5.000	inches
Pin OD Min	6.625	inches	Additional Recut Length	2.125	inches
Pin ID	5.921 ± .016	inches			

Box Blanking Dimensions



Box OD Max	7.440	inches	Box Minimum Length	4.313	inches
Box OD Min	7.340	inches	Additional Recut Length	4.313	inches
Box ID	5.921 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

1/3/2019



Precision Connections BK Blanking Dimensions

6.625 in. 28 lb/ft with 7.39 in. Coupling OD

Pipe Body


Nominal OD	6.625	inches	Plain End Weight	27.65	lb/ft
Nominal Weight	28.00	lb/ft	Drift	5.666	inches
Wall Thickness	0.417	inches	Nominal ID	5.791	inches

Pin Blanking Dimensions



Pin OD Max	6.691	inches	Pin Minimum Length	5.000	inches
Pin OD Min	6.625	inches	Additional Recut Length	2.125	inches
Pin ID	5.791 ± .016	inches			

Box Blanking Dimensions

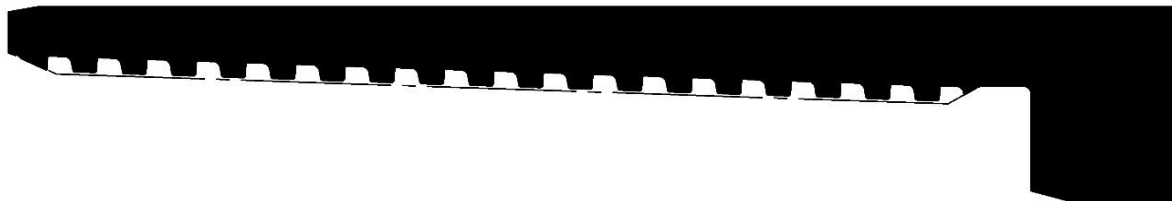

Box OD Max	7.440	inches	Box Minimum Length	4.313	inches
Box OD Min	7.340	inches	Additional Recut Length	4.313	inches
Box ID	5.791 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

1/3/2019



Precision Connections BK Blanking Dimensions

6.625 in. 32 lb/ft with 7.39 in. Coupling OD

Pipe Body

Nominal OD	6.625	inches	Plain End Weight	31.20	lb/ft
Nominal Weight	32.00	lb/ft	Drift	5.550	inches
Wall Thickness	0.475	inches	Nominal ID	5.675	inches

Pin Blanking Dimensions



Pin OD Max	6.691	inches	Pin Minimum Length	5.000	inches
Pin OD Min	6.625	inches	Additional Recut Length	2.125	inches
Pin ID	5.675 ± .016	inches			

Box Blanking Dimensions



Box OD Max	7.440	inches	Box Minimum Length	4.313	inches
Box OD Min	7.340	inches	Additional Recut Length	4.313	inches
Box ID	5.675 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

1/3/2019



Precision Connections BK SC Blanking

Dimensions 8.625 in. 32 lb/ft with 9 in. Coupling OD

Pipe Body					
Nominal OD	8.625	inches	Plain End Weight	31.13	lb/ft
Nominal Weight	32.00	lb/ft	Drift	7.875	inches
Wall Thickness	0.352	inches	Nominal ID	7.921	inches

Pin Blanking Dimensions



Pin OD Max	8.711	inches	Pin Minimum Length	5.500	inches
Pin OD Min	8.625	inches	Additional Recut Length	2.125	inches
Pin ID	7.921 ± .016	inches			

Box Blanking Dimensions




Box OD Max	9.050	inches	Box Minimum Length	4.813	inches
Box OD Min	9.000	inches	Additional Recut Length	4.813	inches
Box ID	7.921 ± .016	inches			



Precision Connections BK SC Blanking Dimensions

8.625 in. 32 lb/ft with 9.15 in. Coupling OD

Pipe Body


Nominal OD	8.625	inches	Plain End Weight	31.13	lb/ft
Nominal Weight	32.00	lb/ft	Drift	7.875	inches
Wall Thickness	0.352	inches	Nominal ID	7.921	inches

Pin Blanking Dimensions



Pin OD Max	8.711	inches	Pin Minimum Length	5.500	inches
Pin OD Min	8.625	inches	Additional Recut Length	2.125	inches
Pin ID	7.921 ± .016	inches			

Box Blanking Dimensions

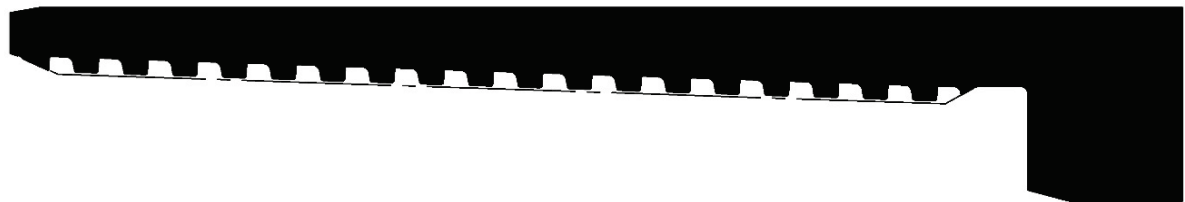

Box OD Max	9.200	inches	Box Minimum Length	4.813	inches
Box OD Min	9.100	inches	Additional Recut Length	4.813	inches
Box ID	7.921 ± .016	inches			



Precision Connections BK Blanking Dimensions

8.625 in. 40 lb/ft with 9.625 in. Coupling OD

Pipe Body


Nominal OD	8.625	inches	Plain End Weight	39.29	lb/ft
Nominal Weight	40.00	lb/ft	Drift	7.625	inches
Wall Thickness	0.450	inches	Nominal ID	7.725	inches

Pin Blanking Dimensions



Pin OD Max	8.711	inches	Pin Minimum Length	5.500	inches
Pin OD Min	8.625	inches	Additional Recut Length	2.125	inches
Pin ID	7.725 ± .016	inches			

Box Blanking Dimensions

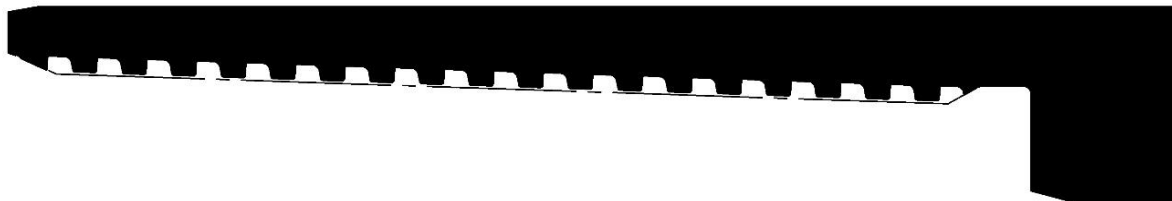

Box OD Max	9.675	inches	Box Minimum Length	4.813	inches
Box OD Min	9.575	inches	Additional Recut Length	4.813	inches
Box ID	7.725 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

9.625 in. 36 lb/ft with 10.625 in. Coupling OD

Pipe Body


Nominal OD	9.625	inches	Plain End Weight	34.86	lb/ft
Nominal Weight	36.00	lb/ft	Drift	8.765	inches
Wall Thickness	0.352	inches	Nominal ID	8.921	inches

Pin Blanking Dimensions



Pin OD Max	9.721	inches	Pin Minimum Length	5.500	inches
Pin OD Min	9.625	inches	Additional Recut Length	2.125	inches
Pin ID	8.921 ± .016	inches			

Box Blanking Dimensions

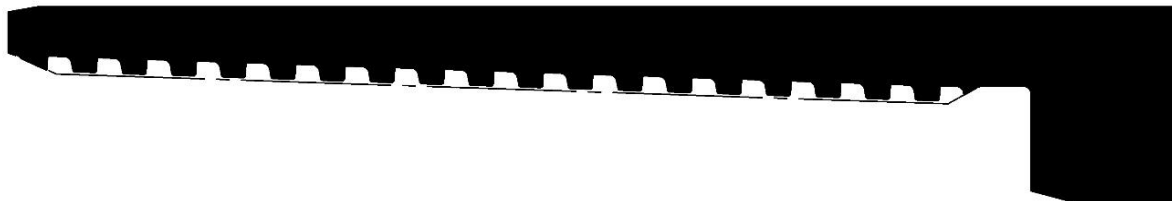

Box OD Max	10.675	inches	Box Minimum Length	4.813	inches
Box OD Min	10.575	inches	Additional Recut Length	4.813	inches
Box ID	8.921 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

9.625 in. 40 lb/ft with 10.625 in. Coupling OD

Pipe Body


Nominal OD	9.625	inches	Plain End Weight	38.94	lb/ft
Nominal Weight	40.00	lb/ft	Drift	8.750	inches
Wall Thickness	0.395	inches	Nominal ID	8.835	inches

Pin Blanking Dimensions



Pin OD Max	9.721	inches	Pin Minimum Length	5.500	inches
Pin OD Min	9.625	inches	Additional Recut Length	2.125	inches
Pin ID	8.835 ± .016	inches			

Box Blanking Dimensions

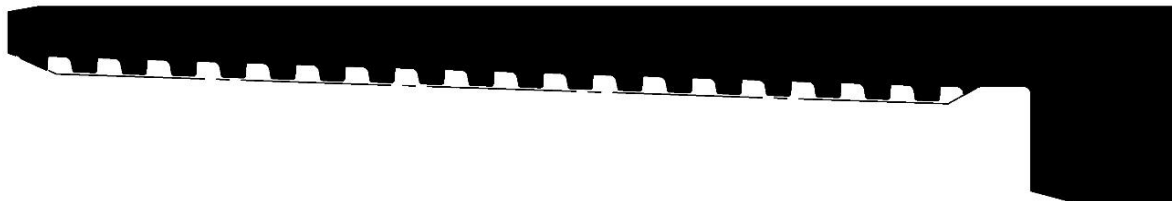

Box OD Max	10.675	inches	Box Minimum Length	4.813	inches
Box OD Min	10.575	inches	Additional Recut Length	4.813	inches
Box ID	8.835 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

9.625 in. 47 lb/ft with 10.625 in. Coupling OD

Pipe Body


Nominal OD	9.625	inches	Plain End Weight	46.14	lb/ft
Nominal Weight	47.00	lb/ft	Drift	8.525	inches
Wall Thickness	0.472	inches	Nominal ID	8.681	inches

Pin Blanking Dimensions



Pin OD Max	9.721	inches	Pin Minimum Length	5.500	inches
Pin OD Min	9.625	inches	Additional Recut Length	2.125	inches
Pin ID	8.681 ± .016	inches			

Box Blanking Dimensions

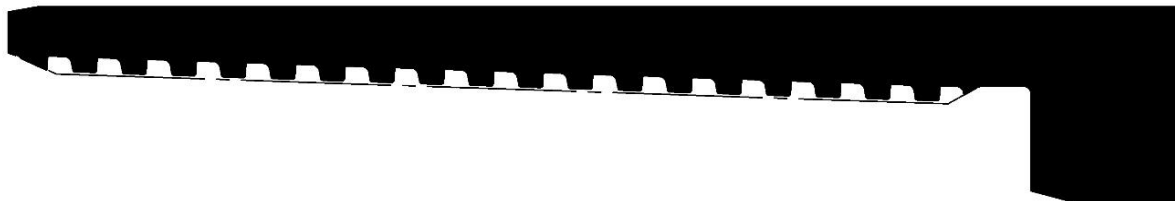

Box OD Max	10.675	inches	Box Minimum Length	4.813	inches
Box OD Min	10.575	inches	Additional Recut Length	4.813	inches
Box ID	8.681 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

9.625 in. 43.5 lb/ft with 10.625 in. Coupling OD

Pipe Body


Nominal OD	9.625	inches	Plain End Weight	42.69	lb/ft
Nominal Weight	43.50	lb/ft	Drift	8.599	inches
Wall Thickness	0.435	inches	Nominal ID	8.755	inches

Pin Blanking Dimensions



Pin OD Max	9.721	inches	Pin Minimum Length	5.500	inches
Pin OD Min	9.625	inches	Additional Recut Length	2.125	inches
Pin ID	8.755 ± .016	inches			

Box Blanking Dimensions

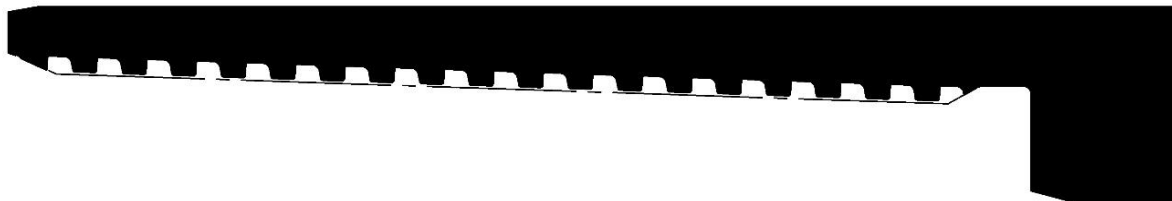

Box OD Max	10.675	inches	Box Minimum Length	4.813	inches
Box OD Min	10.575	inches	Additional Recut Length	4.813	inches
Box ID	8.755 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018



Precision Connections BK Blanking Dimensions

9.625 in. 53.5 lb/ft with 10.625 in. Coupling OD

Pipe Body


Nominal OD	9.625	inches	Plain End Weight	52.85	lb/ft
Nominal Weight	53.50	lb/ft	Drift	8.500	inches
Wall Thickness	0.545	inches	Nominal ID	8.535	inches

Pin Blanking Dimensions



Pin OD Max	9.721	inches	Pin Minimum Length	5.500	inches
Pin OD Min	9.625	inches	Additional Recut Length	2.125	inches
Pin ID	8.535 ± .016	inches			

Box Blanking Dimensions

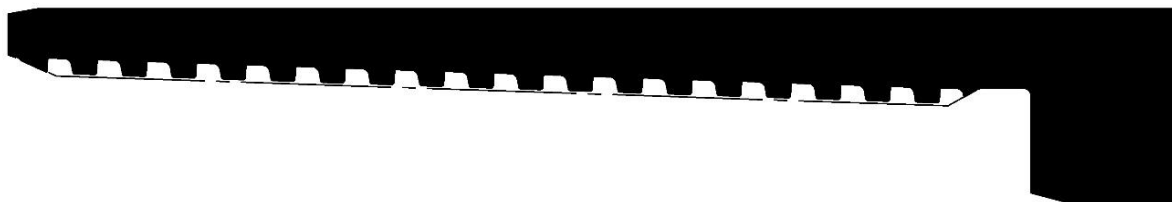

Box OD Max	10.675	inches	Box Minimum Length	4.813	inches
Box OD Min	10.575	inches	Additional Recut Length	4.813	inches
Box ID	8.535 ± .016	inches			

OD and ID transitions to be tapered at 30 degrees to avoid hangups and no drift situations

v1.1

12/4/2018